RNAV (GPS) RWY 35

BIG SPRING/MC MAHON-WRINKLE (BPG)


WAAS	APP CRS	Rwy Ldg	8803
CH 99418	355°	TDZE	2563
W35A		Apt Elev	2573

RNP APCH - GPS.

Baro-VNAV and VDP NA when using MAF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 43°C. When local altimeter setting not received, use MAF altimeter setting: increase LPV DA to 2943 feet; increase LNAV/VNAV DA to 3109 feet and all visibilities ⅛ SM; increase all MDAs 140 feet and LNAV visibility Cat C ⅜ SM and LNAV visibility Cat D ¼ SM.


MISSED APPROACH: Climb to 5200 direct YALUT and hold.


AWOS-3PT	FORT WORTH CENTER	UNICOM
118.025	133.7 350.2	122.8 (CTAF) L

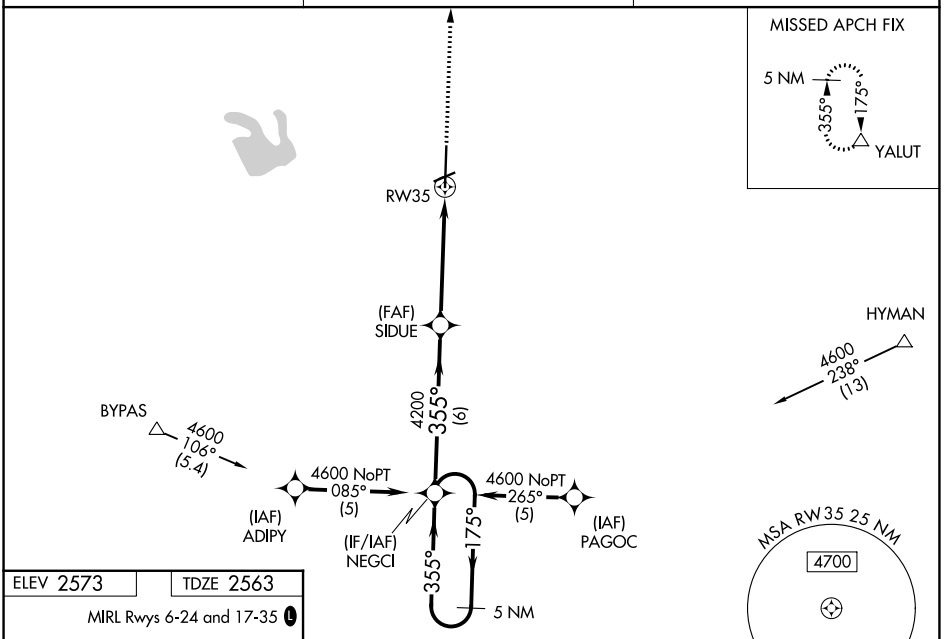

ELEV 2573 TDZE 2563

MIRL Rwys 6-24 and 17-35 L

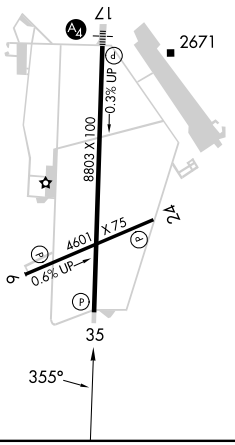

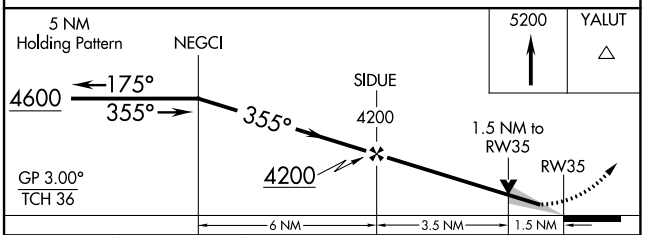

CATEGORY	A	B	C	D
LPV DA	2813-1 250 (300-1)			
LNAV/VNAV DA	2979-1½ 416 (500-1½)			
LNAV MDA	3060-1 497 (500-1)		3060-1⅜ 497 (500-1⅜)	3060-1½ 497 (500-1½)

SC-2, 26 NOV 2026 to 24 DEC 2026
SC-2, 26 NOV 2026 to 24 DEC 2026