| WAAS | APP CRS | Rwy Idg | 6099 |
|---|---|---|---|
| CH 56419 | 353° | TDZE | 1238 |
| W35A | | Apt Elev | 1258 |

# RNAV (GPS) RWY 35


## FREDERICK RGNL (FDR)

RNP APCH-GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C .
A Baro-VNAV and VDP NA when using Vernon altimeter setting. When local altimeter setting not received, use Vernon altimeter setting: increase LPV DA to 1478 feet; increase LNAV/VNAV DA to 1540 feet; increase all MDAs 40 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. Circling Rwy 3, 12,17, 21, 30, NA at night.


MISSED APPROACH: Climb to 4000 direct JIVUG and right turn on track 083° to HUNBI and right turn on track 173° to HOTEX and right turn on track 263° to FAWCI and hold.

| ASOS | ALTUS APP CON * | UNICOM |
|---|---|---|
| 132.675 | 125.1 353.7 | 123.05 (CTAF) L |

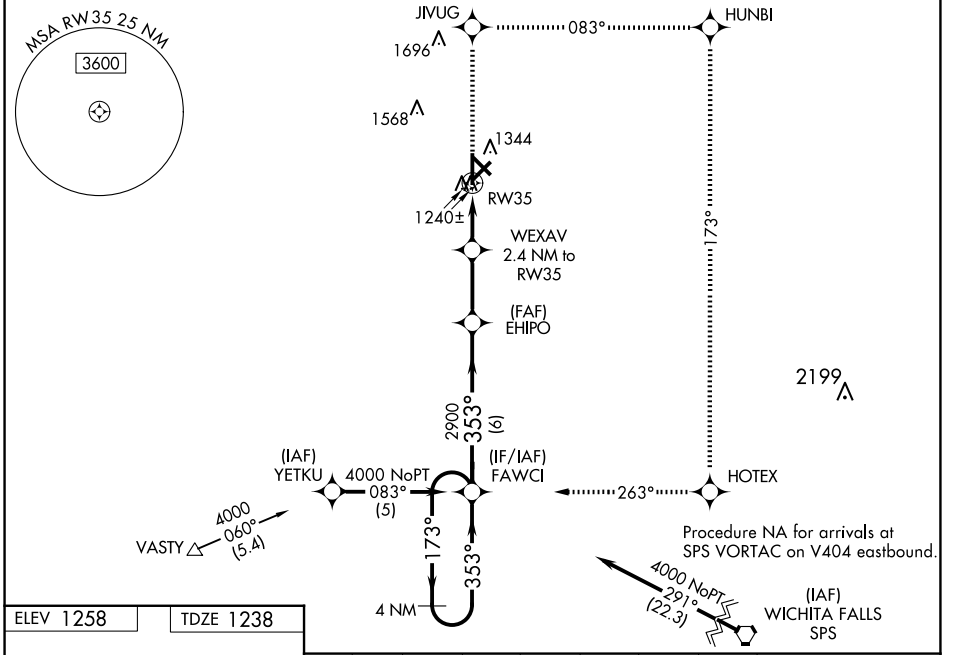


ELEV 1258 TDZE 1238

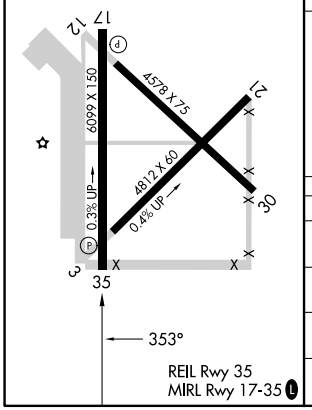

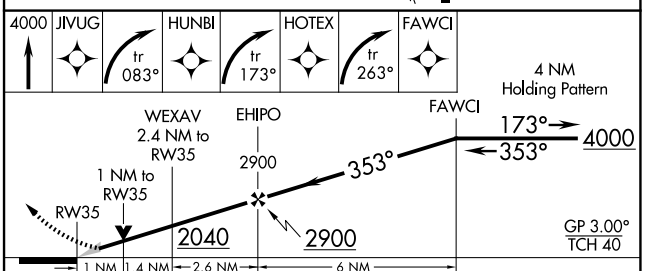
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1438-¾ 200 (200-¾) | | | |
| LNAV/VNAV DA | 1500-1 262 (300-1) | | | |
| LNAV MDA | 1600-1 362 (400-1) | | | 1600-1¼ 362 (400-1¼) |
| CIRCLING | 1700-1 442 (500-1) | 1720-1 462 (500-1) | 1880-1¾ 622 (700-1¾) | 1900-2 642 (700-2) |



SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026