RNAV (GPS) RWY 3

CASPER/NATRONA COUNTY INTL (CPR)

WAAS CH 73006 W03A	APP CRS 032°	Rwy Ldg 10165 TDZE 5328 Apt Elev 5344


RNP APCH - GPS.

T For inoperative ALS, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all
A Cats visibility to RVR 5500, and LNAV Cat D visibility to 1⅜ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C.


MALSR

MISSED APPROACH: Climb to 7500 direct KIVSE and via track 022° to DDY VOR/DME and hold.


ATIS	CASPER APP CON ★	CASPER TOWER ★	GND CON	UNICOM
126.15	120.65 354.1	118.3 (CTAF) L 257.8	121.9	122.95

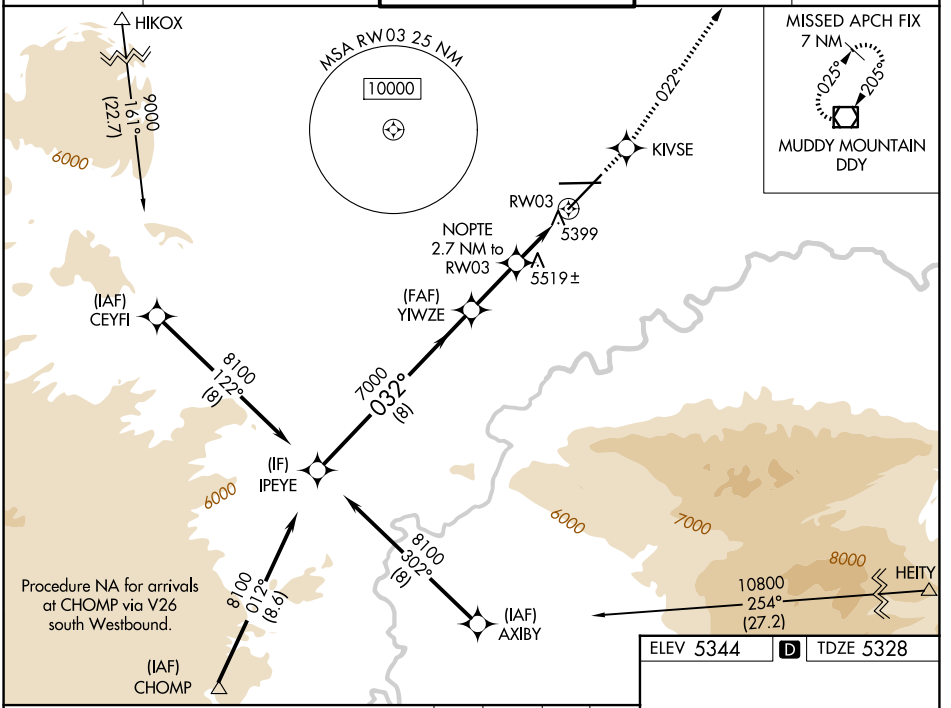

ELEV 5344 D TDZE 5328

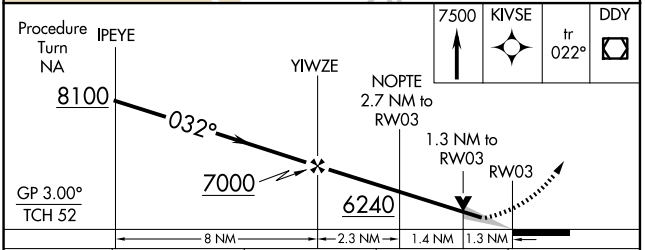

CATEGORY	A	B	C	D
LPV DA	5643/24 315 (300-½)			
LNAV/VNAV DA	5691/40 363 (400-¾)			
LNAV MDA	5780/24 452 (500-½)		5780/45 452 (500-⅞)	5780/50 452 (500-1)
CIRCLING	5780-1 436 (500-1)	5800-1 456 (500-1)	5860-1½ 516 (600-1½)	6200-2¾ 856 (900-2¾)



REIL Rwy 21 L
HIRL Rwys 3-21 and 8-26 L

NW-1, 26 NOV 2026 to 24 DEC 2026
NW-1, 26 NOV 2026 to 24 DEC 2026