| LOC I-COS | APP CRS | Rwy Ldg | 11022 |
|---|---|---|---|
| 109.9 | 352° | TDZE | 6075 |
| | | Apt Elev | 6187 |

# ILS or LOC RWY 35L

## CITY OF COLORADO SPRINGS MUNI (COS)


ADF required for LOC only.

RADAR monitoring required when R-2601 in use. For inop ALS, increase S-LOC 35L Cat C/D visibility to RVR 4500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

| ATIS | SPRINGS APP CON | SPRINGS TOWER | GND CON |
|---|---|---|---|
| 125.0 254.3 | 124.0 257.875 | 119.9 360.6 | 121.7 348.6 |

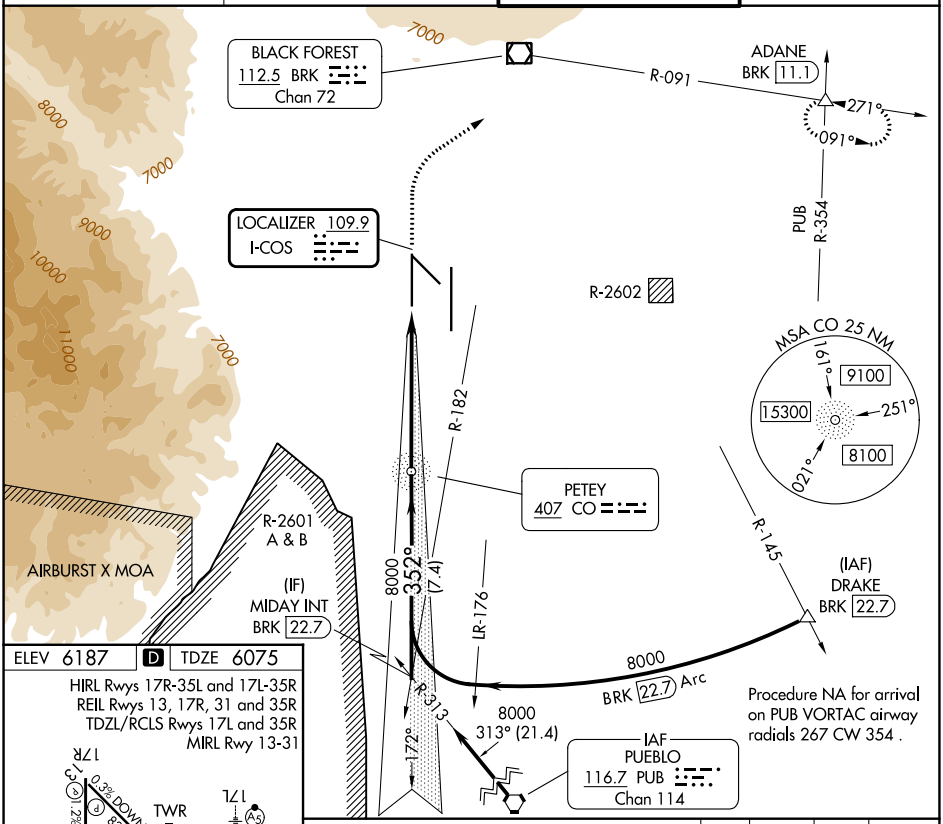



ELEV 6187 D TDZE 6075

HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZL/RCLS Rwys 17L and 35R
MIRL Rwy 13-31

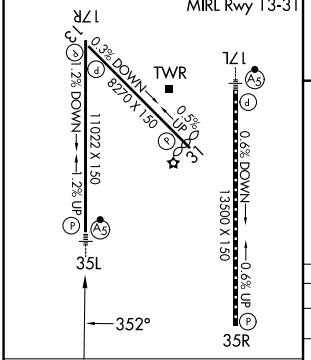


FAF to MAP 6 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 6:00 | 4:00 | 3:00 | 2:24 | 2:00 |

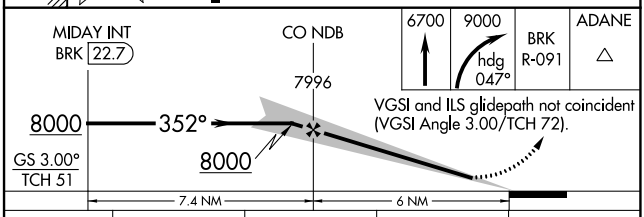


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 35L* | 6275/24 200 (100-½) | | | |
| S-LOC 35L | 6340/24 265 (200-½) | | | |
| CIRCLING | 6740-1 553 (600-1) | 6760-1 573 (600-1) | 6980-2¼ 793 (800-2¼) | 7240-3 1053 (1100-3) |



SW-1, 26 NOV 2026 to 24 DEC 2026
SW-1, 26 NOV 2026 to 24 DEC 2026