LOC/DME I-AHI	APP CRS	Rwy Ldg 13500
109.1	352°	TDZE 6118
Chan 28		Apt Elev 6187


ILS or LOC RWY 35R

CITY OF COLORADO SPRINGS MUNI (COS)

RADAR required when R-2601 in use.

MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and on BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.


ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6

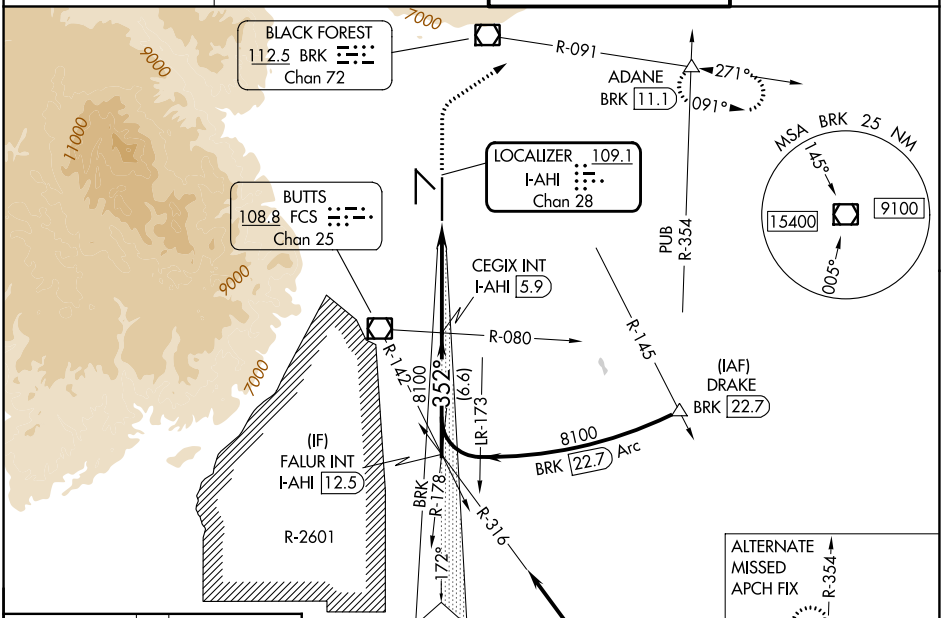

Procedure NA for arrival on PUB VORTAC airway radials 267 CW 354.

ELEV 6187 | D | TDZE 6118


MIRL Rwy 13-31
HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZL/RCLS Rwys 17L and 35R

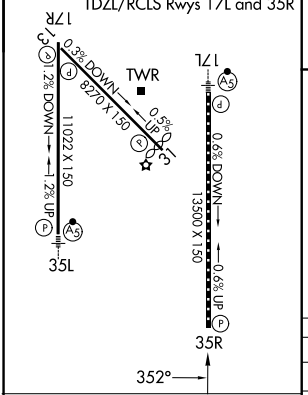

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

FALUR INT I-AHI 12.5 | CEGIX INT I-AHI 5.9

6700	9000 hdg 047°	BRK R-091	ADANE △

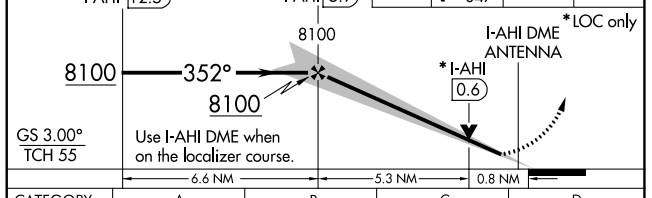

CATEGORY	A	B	C	D
S-ILS 35R	6318/40	200 (200-¾)		
S-LOC 35R	6420/55	302 (300-1)	6420/45	302 (300-⅞)
CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

SW-1, 26 NOV 2026 to 24 DEC 2026
SW-1, 26 NOV 2026 to 24 DEC 2026