RNAV (GPS) RWY 13

DES MOINES INTL (DSM)


WAAS	APP CRS	Rwy Ldg	9001
CH 72602	131°	TDZE	922
W13A		Apt Elev	958

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cats C and D visibility to RVR 4500.
#RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR (A5)

MISSED APPROACH: Climb to 3000 direct CYCLN and hold.


ATIS	DES MOINES APP CON	DES MOINES TOWER	GND CON
119.55	123.9 307.15	118.3 257.8	121.9 348.6

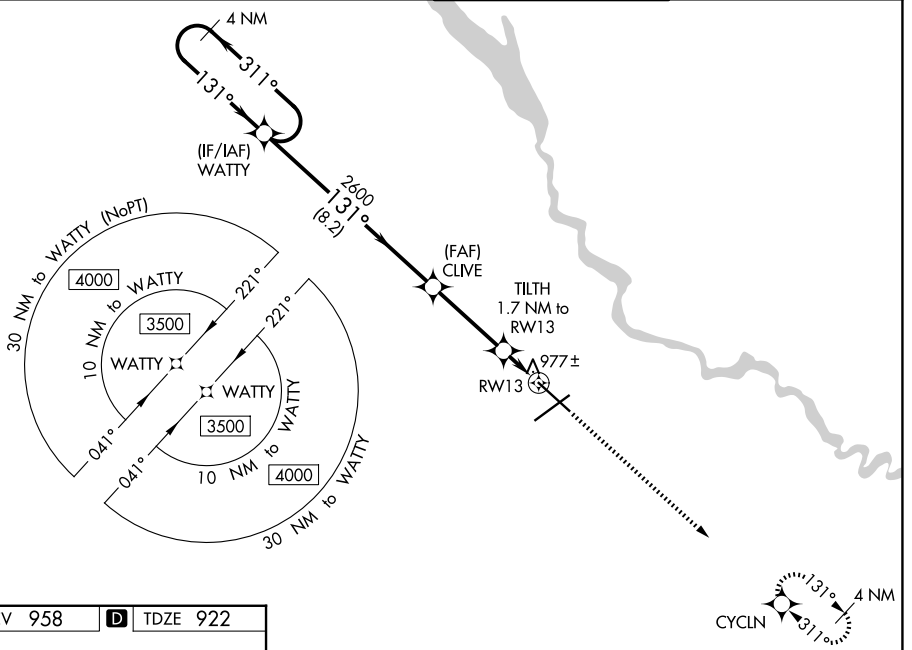

ELEV 958 D TDZE 922



REIL Rwy 23
TDZL/RCLS Rwy 31
HIRL Rwys 13-31 and 5-23

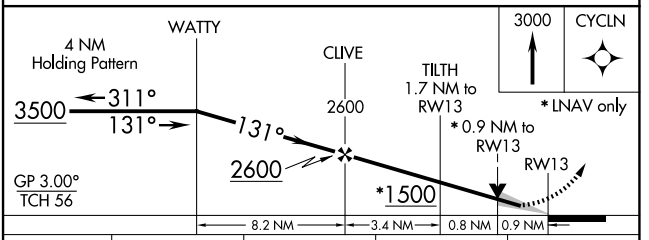

CATEGORY	A	B	C	D
LPV DA#	1122/24 200 (200-½)			
LNAV/VNAV DA	1172/24 250 (300-½)			
LNAV MDA	1240/24 318 (300-½)			
CIRCLING	1420-1 462 (500-1)		1600-1¾ 642 (700-1¾)	1760-2½ 802 (900-2½)

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026