RNAV (GPS) RWY 34

FORT WORTH MEACHAM INTL (FTW)


WAAS	APP CRS	Rwy Ldg	7306
CH 53412	344°	TDZE	680
W34A		Apt Elev	710

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV Cat D and LNAV Cat D visibility to 1⅜ mile.


MALS


MISSED APPROACH: Climb to 3000 direct WOROD and hold.

ATIS	LONE STAR APP CON	MEACHAM TOWER	GND CON
120.7	118.1 306.95 (N) 135.975 379.9 (S)	118.3 257.8	121.9

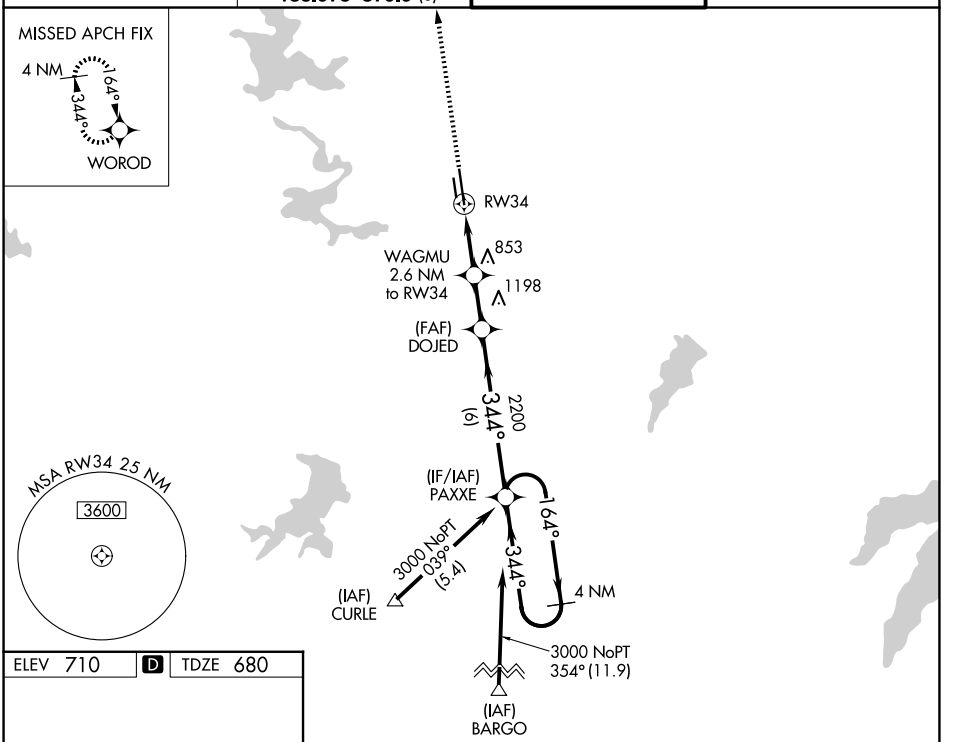

ELEV 710 D TDZE 680

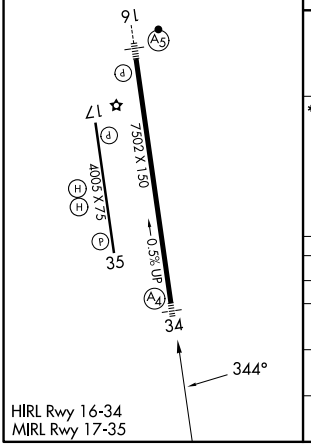

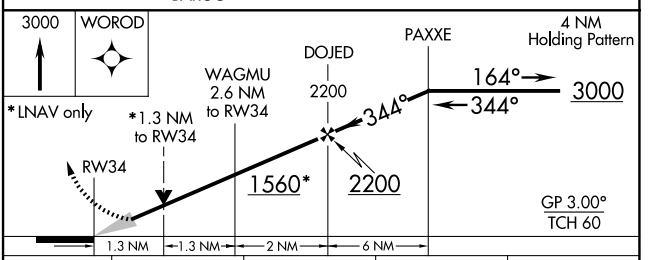

CATEGORY	A	B	C	D
LPV DA	880-¾ 200 (200-¾)			
LNAV/VNAV DA	1091-1⅛ 411 (400-1⅛)			
LNAV MDA	1160-¾ 480 (500-¾)		1160-1⅛ 480 (500-1⅛)	
CIRCLING	1260-1 550 (600-1)	1280-1 570 (600-1)	1340-1¾ 630 (700-1¾)	1500-2½ 790 (800-2½)

SC-2, 26 NOV 2026 to 24 DEC 2026
SC-2, 26 NOV 2026 to 24 DEC 2026