RNAV (GPS) RWY 18

GREAT BEND MUNI (GBD)


WAAS	APP CRS	Rwy Ldg	7852
CH 70617	176°	TDZE	1885
W18A		Apt Elev	1887


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use LYO altimeter setting and increase LPV DA to 2181 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 2356 feet and all visibilities ⅜ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ¼ SM. Baro-VNAV and VDP NA when using LYO altimeter setting.


MISSED APPROACH: Climb to 4000 direct HESMA and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
119.275	118.8 322.425	122.8 (CTAF) L

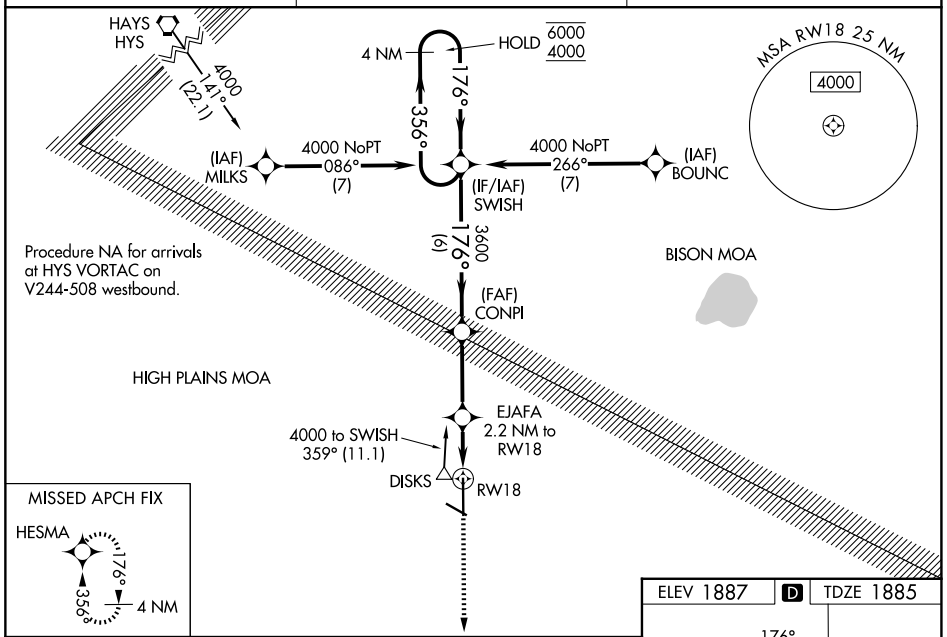

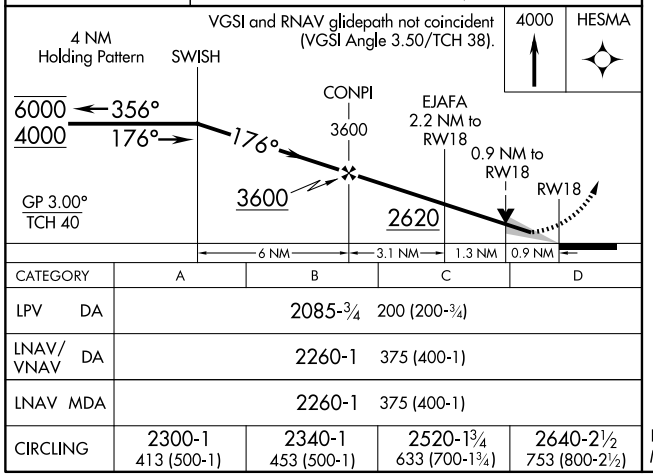

CATEGORY	A	B	C	D
LPV DA	2085-¾	200 (200-¾)		
LNAV/VNAV DA	2260-1	375 (400-1)		
LNAV MDA	2260-1	375 (400-1)		
CIRCLING	2300-1 413 (500-1)	2340-1 453 (500-1)	2520-1¾ 633 (700-1¾)	2640-2½ 753 (800-2½)

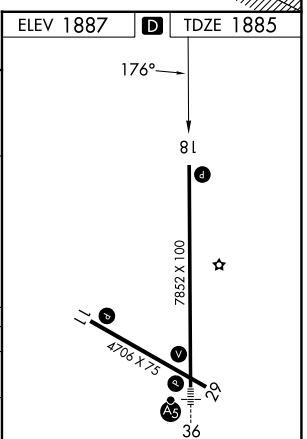

REIL Rwy 18 L
MIRL Rwys 11-29 and 18-36 L

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026