RNAV (GPS) RWY 18

GREENWOOD-LEFLORE (GWO)

WAAS	APP CRS	Rwy Ldg	6501
CH 50199	182°	TDZE	145
W18A		Apt Elev	162

RNP APCH-GPS.


T A


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. Baro-VNAV and VDP NA when using Greenville altimeter setting. For inop ALS when using Greenville altimeter setting, increase LPV all Cats visibility to 1½ SM, and LNAV/VNAV all Cats to 1¾ SM, and LNAV Cat A/B to 1 SM, and Cat C/D to 1⅞ SM. When local altimeter setting not received, use Greenville altimeter setting: increase LPV DA to 580 feet and visibility ¼ SM, LNAV/VNAV DA to 675 feet and visibility ⅜ SM; increase all MDAS 120 feet and visibility LNAV Cat C/D ¼ SM and Circling Cat C ½ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM, and LNAV all Cats to 1 SM. Rwy 18 helicopter visibility reduction below ¾ SM NA. Circling Rwy 5, 23 NA at night.

MALSR

MISSED APPROACH: Climb to 2100 direct YECUD and hold.

ASOS	MEMPHIS CENTER	GREENWOOD TOWER ★	GND CON	UNICOM
119.975	132.5 259.1	118.35 (CTAF) L 367.6	125.55 373.4	122.95

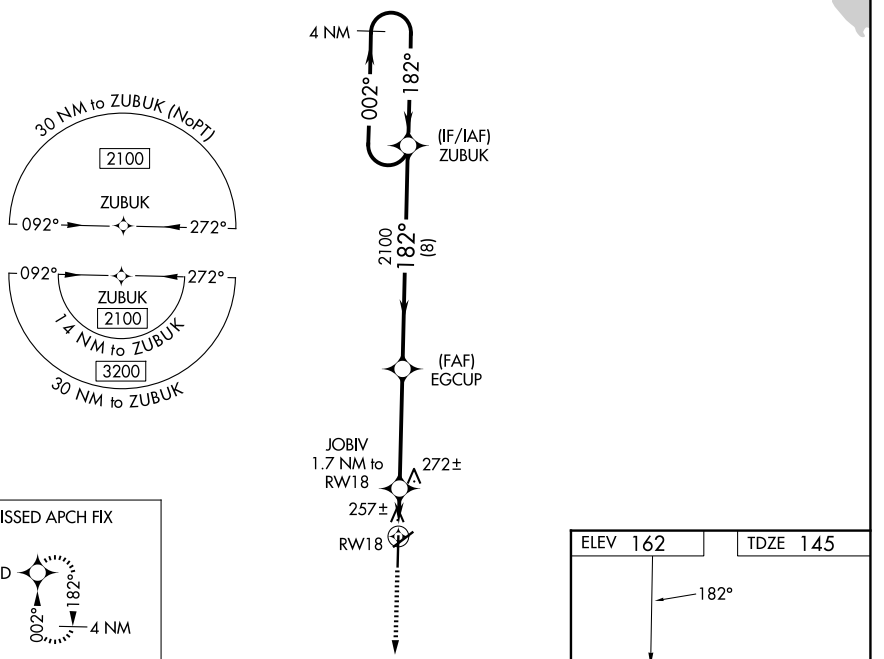

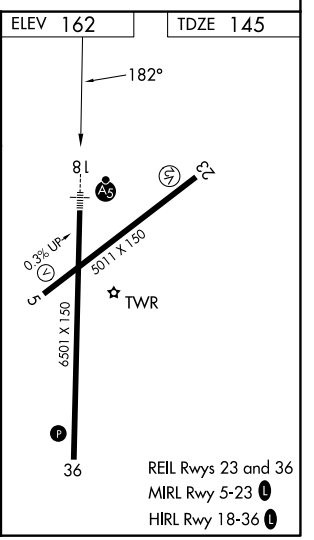

CATEGORY	A	B	C	D
LPV DA	471-¾ 326 (400-¾)			
LNAV/VNAV DA	566-1 421 (500-1)			
LNAV MDA	520-¾ 375 (400-¾)			
CIRCLING	760-1 598 (700-1)		1000-2½ 838 (900-2½)	1120-3 958 (1000-3)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026