# RNAV (RNP) Y RWY 27

HELENA RGNL (HLN)

| APP CRS | Rwy Ldg | 9000 |
|---|---|---|
| 271° | TDZE | 3852 |
| | Apt Elev | 3877 |

RNP AR APCH - GPS.


For uncompensated Baro-VNAV systems, -16°C procedure NA below -28°C or above 54°C. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 DA* visibility all Cats to 1⅜ SM.

MALSR


MISSED APPROACH: Climb to 12000 on the RNAV missed approach route to PIXXI and hold, continue climb-in-hold to 12000.

*Missed approach requires minimum climb of 260 feet per NM to 7900; if unable to meet climb gradient, see RNAV (RNP) Z RWY 27.

| ATIS | HELENA APP CON * | HELENA TOWER * | GND CON | UNICOM |
|---|---|---|---|---|
| 120.4 | 119.5 229.4 | 118.3 (CTAF) L 257.8 | 121.9 | 122.95 |

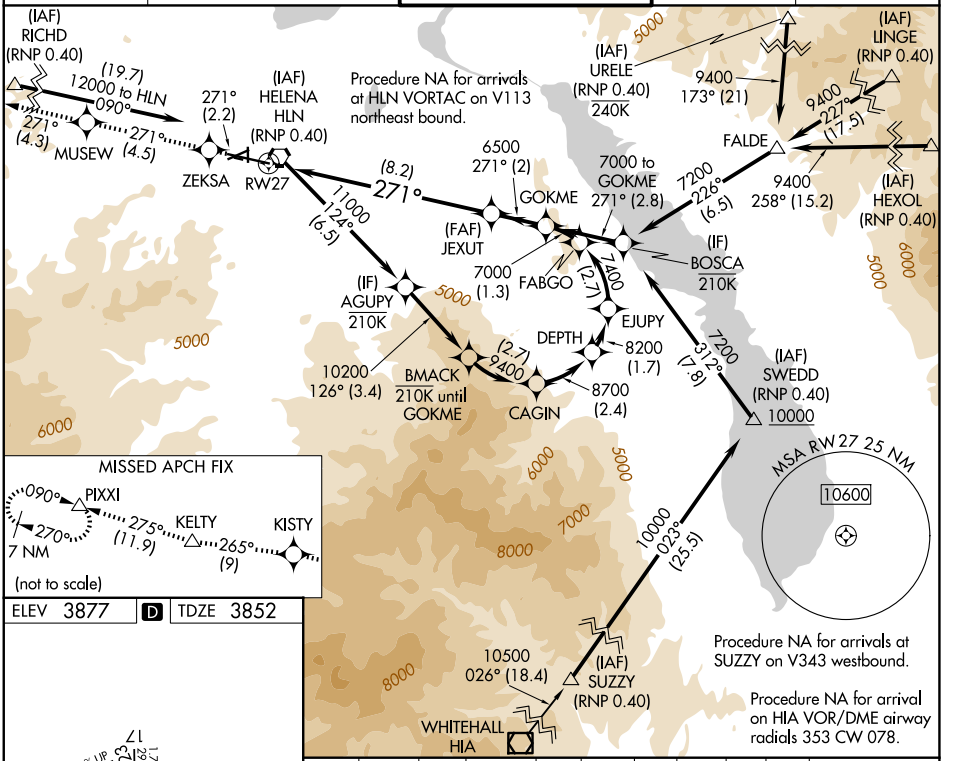



ELEV 3877 D TDZE 3852




| 12000 | ZEKSA | tr 271° | MUSEW | tr 271° | KISTY | tr 265° | KELTY | tr 275° | PIXXI |
|---|---|---|---|---|---|---|---|---|---|
| tr 271° | | | | | | | | | |

See planview for multiple IF locations.

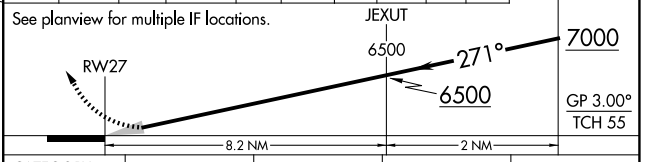


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.15 DA* | 4284-¾ | 432 (500-¾) | | |
| RNP 0.30 DA* | 4321-1 | 469 (500-1) | | |

AUTHORIZATION REQUIRED

REIL Rwys 9, 17, and 35 L
MIRL Rwys 5-23 and 17-35 L
HIRL Rwy 9-27 L



NW-1, 26 NOV 2026 to 24 DEC 2026
NW-1, 26 NOV 2026 to 24 DEC 2026