RNAV (GPS) RWY 16

HAWKINS FLD (HKS)


WAAS	APP CRS	Rwy Ldg	5387
CH 50316	159°	TDZE	341
W16A		Apt Elev	341

T A Baro-VNAV NA when using Jackson-Medgar Wiley Evers Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 19 feet and all MDA 20 feet. Increase LNAV/VNAV all Cats and LNAV Cats C/D visibilities ⅛ mile and Circling Cat C ¼ mile. For inop MALSR when using Jackson-Medgar Wiley Evers Intl altimeter setting increase LNAV/VNAV all Cats to 1⅛.

MALS

MISSED APPROACH: Climb to 2000 direct JILHO and hold.

ASOS	JACKSON APP CON ★	HAWKINS TOWER ★	GND CON	CLNC DEL	UNICOM
120.625	123.9 319.2	119.65 (CTAF) L 257.8	121.9 239.0	121.9 (When twr closed)	122.95

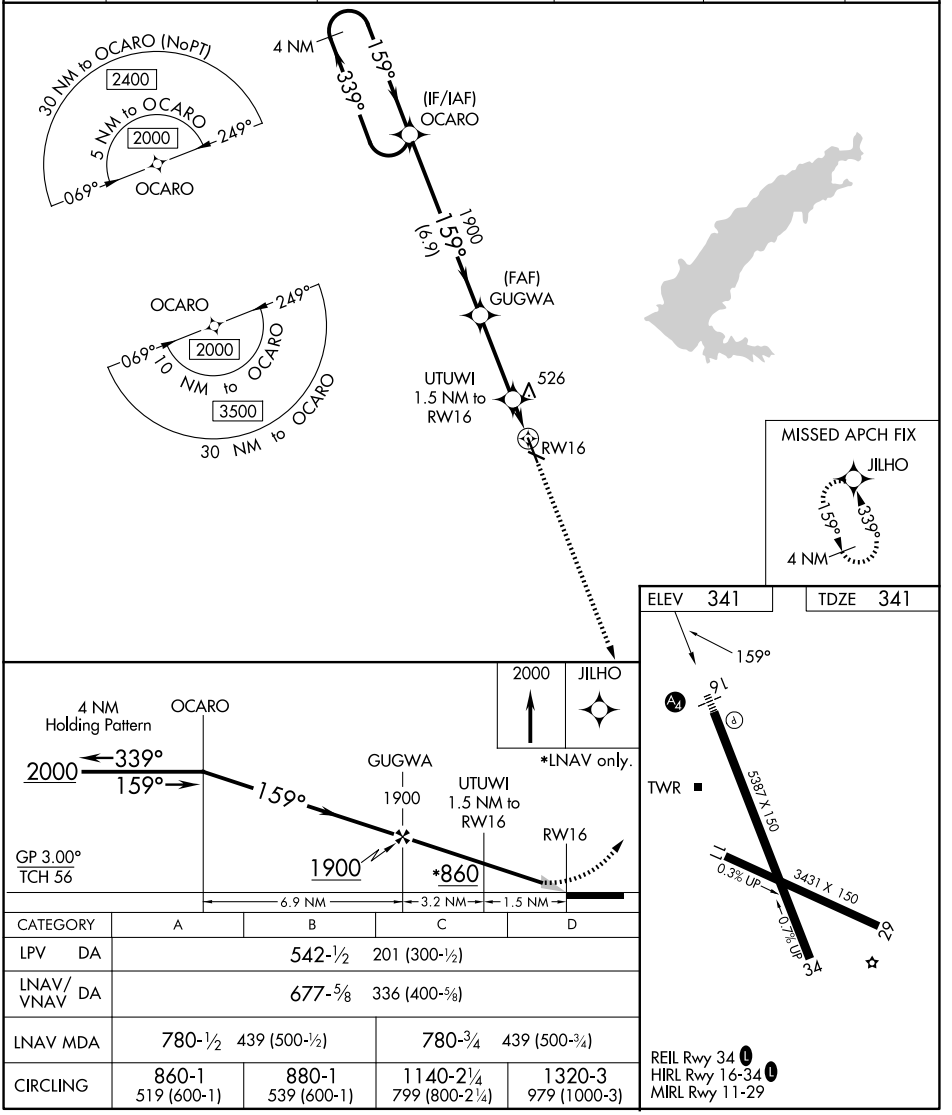

CATEGORY	A	B	C	D
LPV DA	542-½ 201 (300-½)			
LNAV/VNAV DA	677-⅝ 336 (400-⅝)			
LNAV MDA	780-½ 439 (500-½)		780-¾ 439 (500-¾)	
CIRCLING	860-1 519 (600-1)	880-1 539 (600-1)	1140-2¼ 799 (800-2¼)	1320-3 979 (1000-3)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026