JACKSONVILLE, FLORIDA

RNAV (RNP) Y RWY 28

APCH CRS	Rwy ldg	9003
276°	TDZE	13
	Arpt Elev	23

(USN) JACKSONVILLE NAS (TOWERS FLD) (KNIP)

RNP AR APCH-GPS

T * When ALS inop, increase vis to 1 mile.


SALSF A2

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.


ATIS	APP CON/DEP CON	TOWER	GND CON	CLNC DEL	ASR/PAR
124.35 290.425	127.775 377.075	125.15 (CTAF) 340.2	128.6 336.4	134.775 353.675	

AUTHORIZATION REQUIRED

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (129°F).

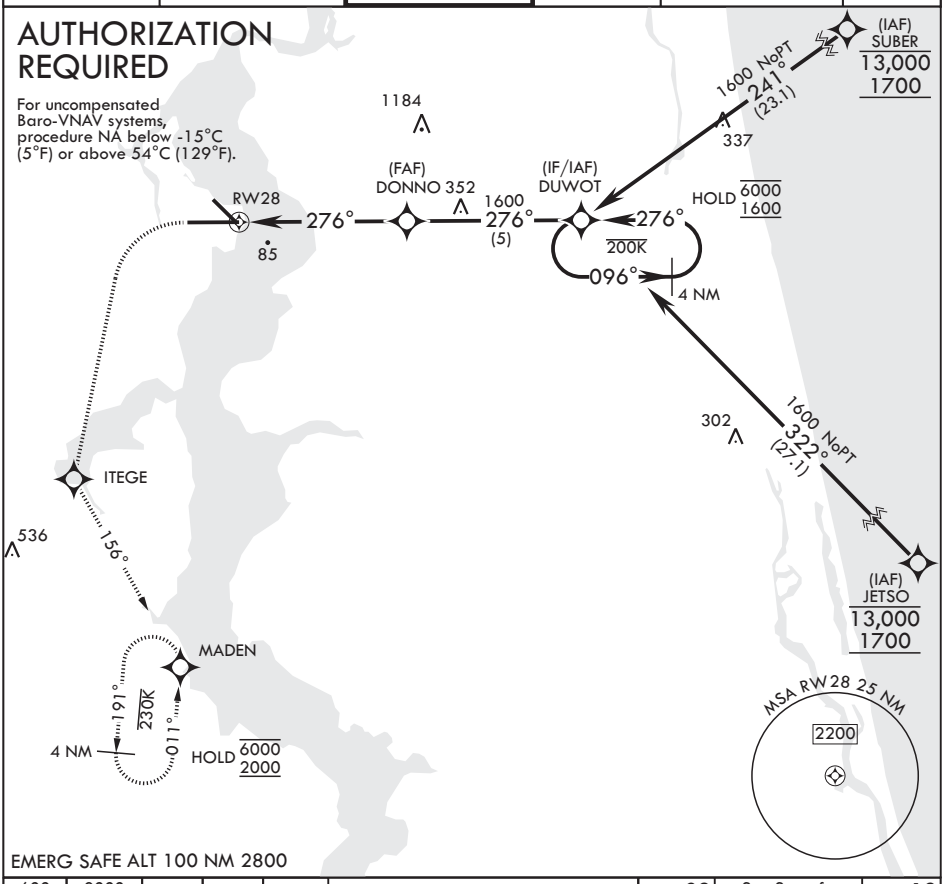


600	2000	ITEGE	tr	MADEN
crs 276°			156°	

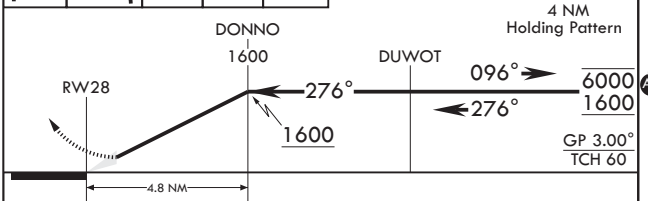

CATEGORY	A	B	C	D
RNP 0.30 DA*	356-¾	343	(400-¾)	

ELEV 23 — See Supp for declared dist. — TDZE 13



HIRL Rwy 10-28

JACKSONVILLE, FLORIDA — 30°14'N - 81°41'W — JACKSONVILLE NAS (TOWERS FLD) (KNIP)

Amdt 2 02OCT25

RNAV (RNP) Y RWY 28

SE-3, 26 NOV 2026 to 24 DEC 2026