WAAS	APP CRS	Rwy Ldg	7414
CH 99521	301°	TDZE	38
W30A		Apt Elev	60

RNAV (GPS) Z RWY 30

LONG BEACH (DAUGHERTY FLD) (LGB)


RNP APCH.

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LNAV Cat C and D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct PADDR and hold


ATIS	SOCAL APP CON	LONG BEACH TOWER★	GND CON	UNICOM
127.75	125.35 316.125	119.4 (CTAF) L 257.6 (8R/26L, 30) 120.5 257.6 (8L/26R, 12)	133.0 257.6	122.95

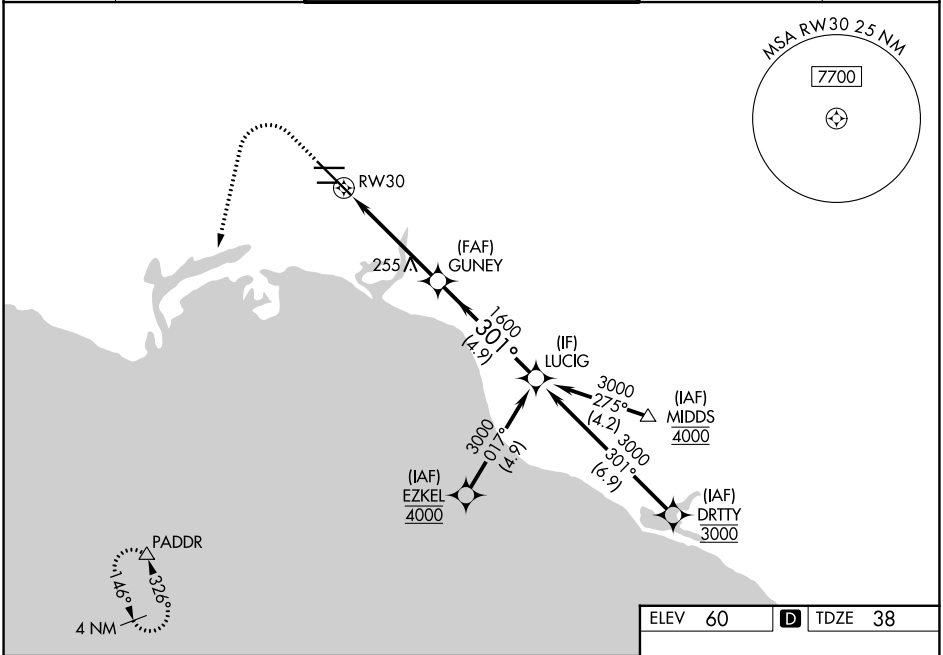

800	3000	PADDR
↑	↱	△


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 64).

*LNAV only

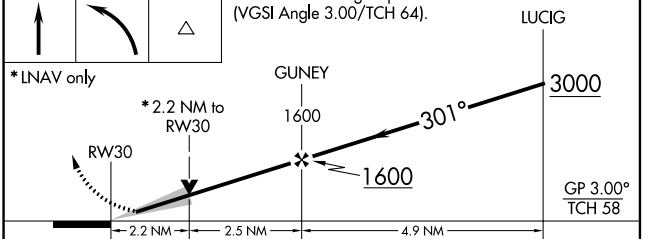

CATEGORY	A	B	C	D
LPV DA	261/18 223 (300-½)			
LNAV/VNAV DA	568/55 530 (600-1)			
LNAV MDA	520/24 482 (500-½)		520/50 482 (500-1)	
CIRCLING	840-1 780 (800-1)		840-1⅜ 780 (800-1⅜)	

ELEV 60 D TDZE 38

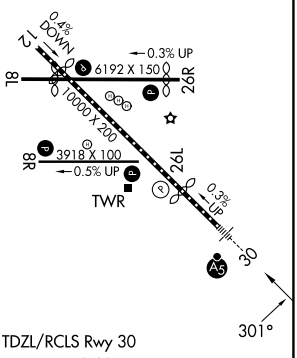

TDZL/RCLS Rwy 30
HIRL Rwy 12-30
HIRL Rwy 8R-26L L
MIRL Rwy 8L-26R L
REIL Rwys 8R, 12, 26L, and 26R L

SW-3, 26 NOV 2026 to 24 DEC 2026
SW-3, 26 NOV 2026 to 24 DEC 2026