WAAS	APP CRS	Rwy Ldg	5764
CH 42600	043°	TDZE	2634
W04A		Apt Elev	2634

RNAV (GPS) RWY 4


FRANK WILEY FLD (MLS)


RNP APCH-GPS.

V A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3051 and all visibilities ⅛ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities ⅝ SM and Circling Cat C and D visibilities ½ SM. Baro-VNAV and VDP NA when using Glendive altimeter setting.

MISSED APPROACH: Climb to 6000 direct AXUPE and hold, continue climb-in-hold to 6000.


ASOS	SALT LAKE CENTER	UNICOM
135.575	126.85 305.2	123.0 (CTAF) L

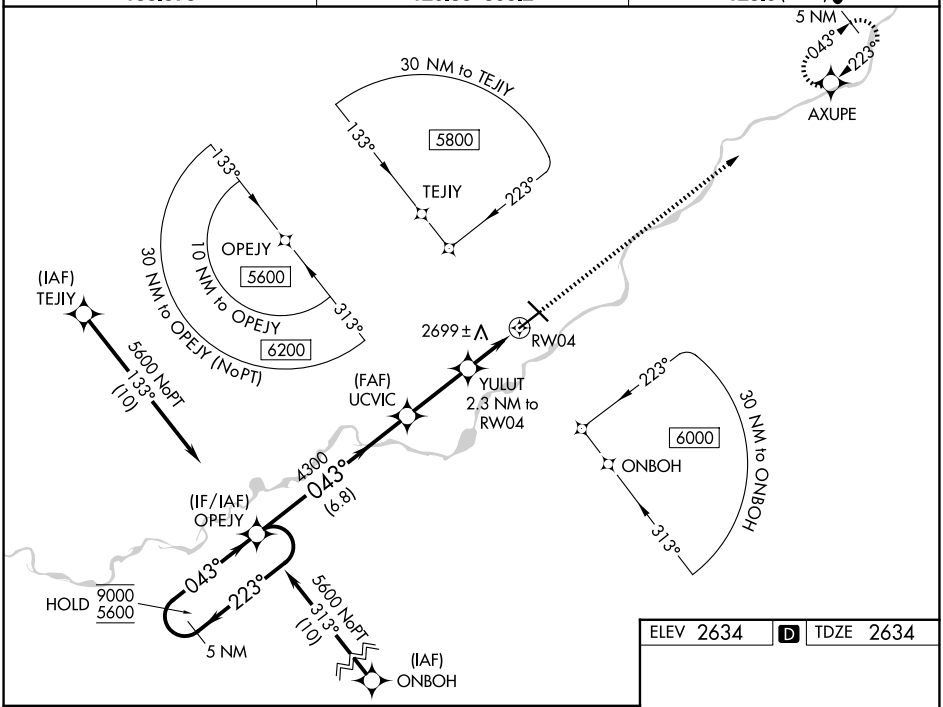

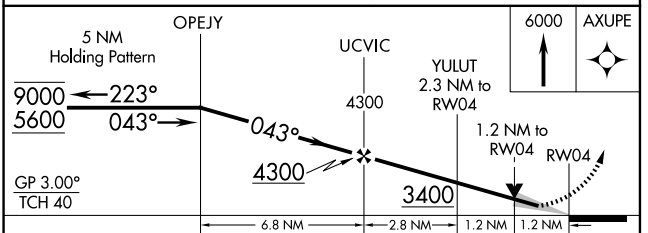

CATEGORY	A	B	C	D
LPV DA	2884-1 250 (300-1)			
LNAV/VNAV DA	2884-1 250 (300-1)			
LNAV MDA	3040-1 406 (500-1)		3040-1⅛ 406 (500-1⅛)	
CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)

ELEV 2634 D TDZE 2634



MIRL Rwys 4-22 and 13-31 L
REIL Rwys 4, 13, 22 and 31 L

NW-1, 26 NOV 2026 to 24 DEC 2026
NW-1, 26 NOV 2026 to 24 DEC 2026