VOR RWY 32

MOBILE INTL (BFM)


VORTAC BFM	APP CRS	Rwy Ldg	9618
116.35	333°	TDZE	25
Chan 110(Y)		Apt Elev	26

When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase all MDAs 60 feet. For inop MALSR, increase S-32 Cats C/D visibility to 1⅜ SM. For inop MALSR when using Mobile Rgnl altimeter setting, increase S-32 Cats C/D visibility to 1⅝ SM.

MALSR

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 via heading 040° and BFM VORTAC R-031 to STETS INT and hold.

ATIS	MOBILE APP CON ★	INTERNATIONAL TOWER ★	GND CON	UNICOM
135.575	118.5 269.3	118.8 (CTAF) L 251.1	121.7 239.3	122.95

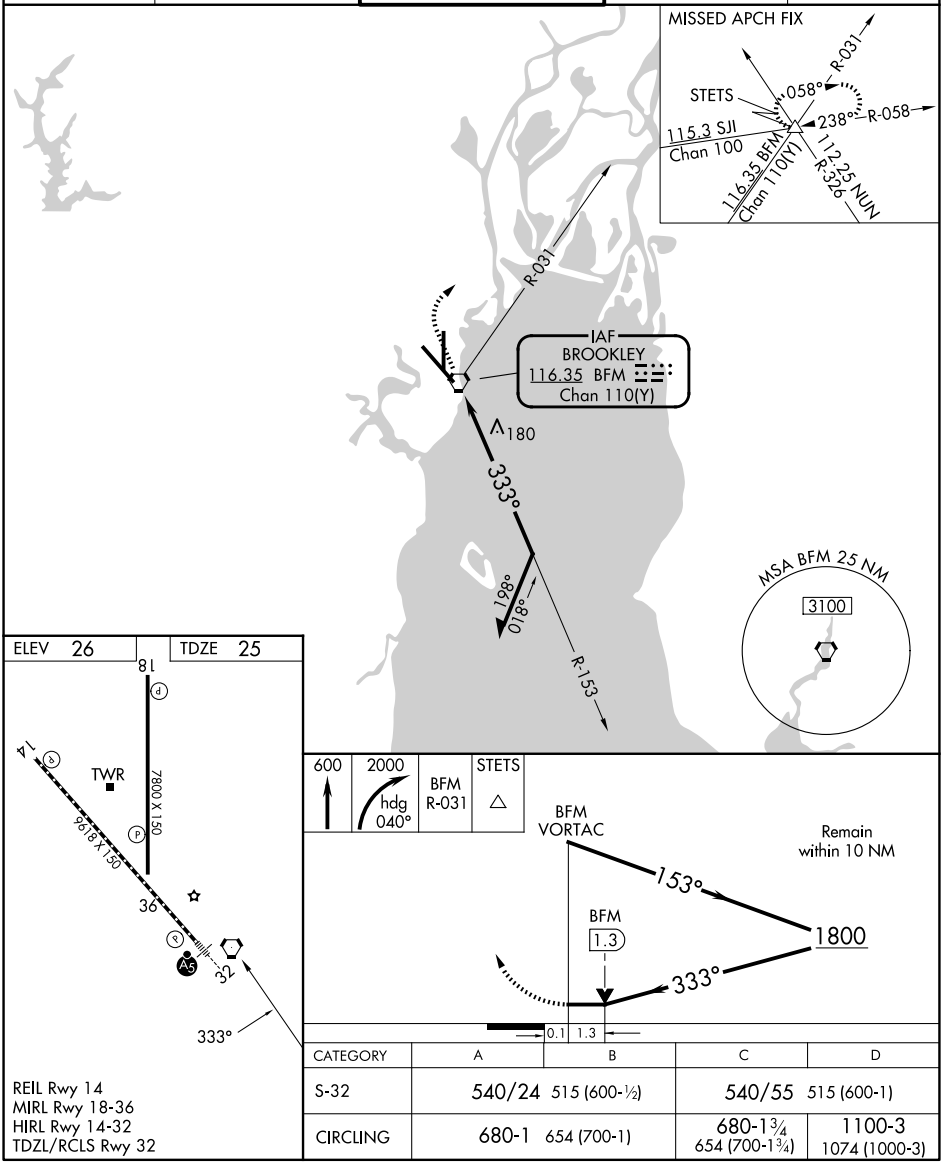

CATEGORY	A	B	C	D
S-32	540/24 515 (600-½)		540/55 515 (600-1)	
CIRCLING	680-1 654 (700-1)		680-1¾ 654 (700-1¾)	1100-3 1074 (1000-3)

REIL Rwy 14
MIRL Rwy 18-36
HIRL Rwy 14-32
TDZL/RCLS Rwy 32

SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026