WAAS	APP CRS	Rwy Ldg	6694
CH 90518	117°	TDZE	544
W12A		Apt Elev	551

RNAV (GPS) RWY 12


NORTHWEST ALABAMA RGNL (MSL)


RNP APCH.

T Rwy 12 helicopter visibility reduction below ¾SM NA. For uncompensated Baro-VNAV systems, A LNAV/VNAV NA below -4°C or above 54°C. When local altimeter setting not received use Decatur altimeter setting and increase LPV DA to 934 feet, LNAV/VNAV DA to 1025 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ⅜ SM, LNAV Cat C and D visibility ⅜ SM and Circling Cat C and D visibility ½ SM. Baro-VNAV and VDP NA when using Decatur altimeter setting.


MISSED APPROACH: Climb to 2700 direct HUPOK and hold.

ASOS	MEMPHIS CENTER	GCO	UNICOM
119.425	120.8 307.0	121.725	123.05 (CTAF) L

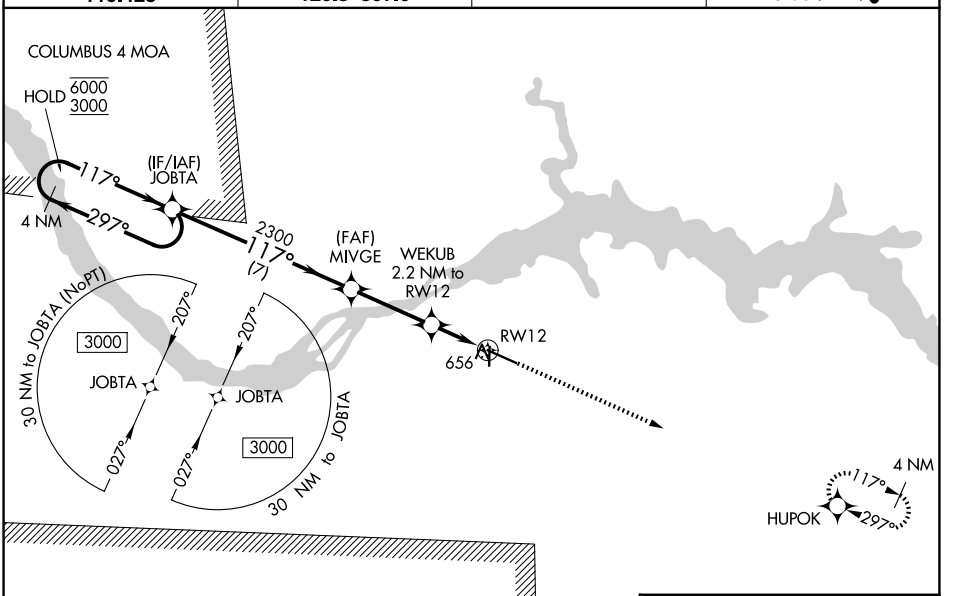

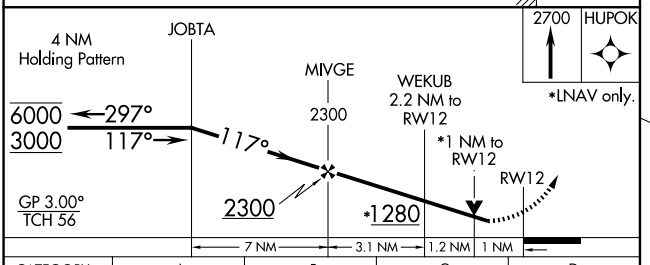

CATEGORY	A	B	C	D
LPV DA		851-1	307 (300-1)	
LNAV/VNAV DA		942-1¼	398 (400-1¼)	
LNAV MDA		920-1	376 (400-1)	
CIRCLING	1040-1 489 (500-1)		1280-2 729 (800-2)	1280-2¼ 729 (800-2¼)



REIL Rwy 12 L
MIRL Rwy 18-36 L
HIRL Rwy 12-30 L

SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026