WAAS	APP CRS	Rwy Ldg	4000
CH 61135	004°	TDZE	547
W36A		Apt Elev	551


RNAV (GPS) RWY 36
NORTHWEST ALABAMA RGNL (MSL)


RNP APCH-GPS.


Circling to Rwy 18 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Baro-VNAV and VDP NA when using Decatur altimeter setting. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 874, LNAV/VNAV DA to 1012 and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D visibility ¼ mile, and Circling Cats C/D visibility ½ mile.

MISSED APPROACH: Climb to 3000 direct TUBYO and hold.

ASOS	MEMPHIS CENTER	GCO	UNICOM
119.425	120.8 307.0	121.725	123.05 (CTAF) L

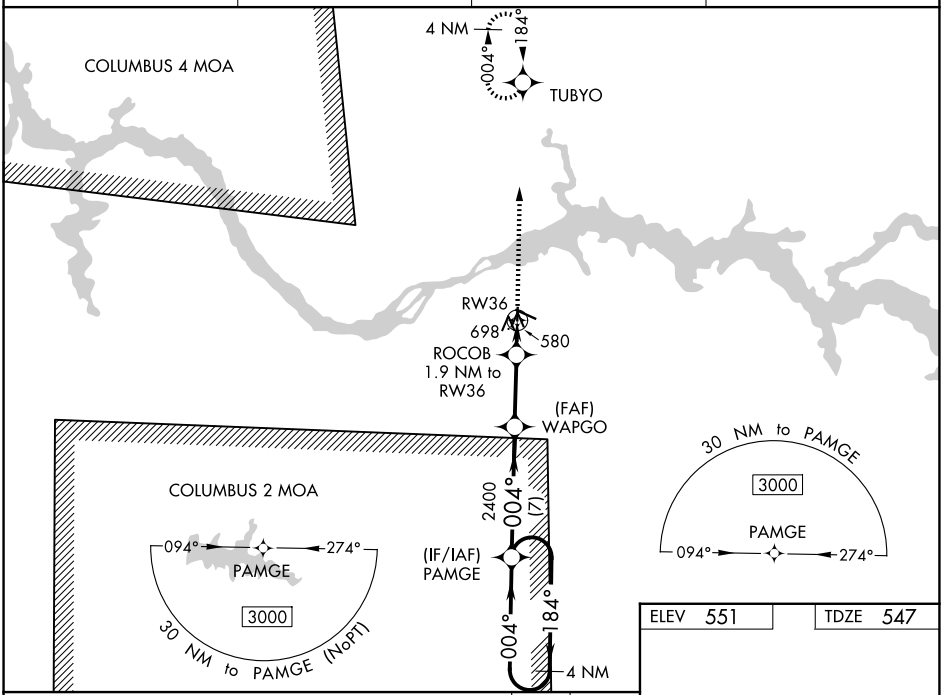

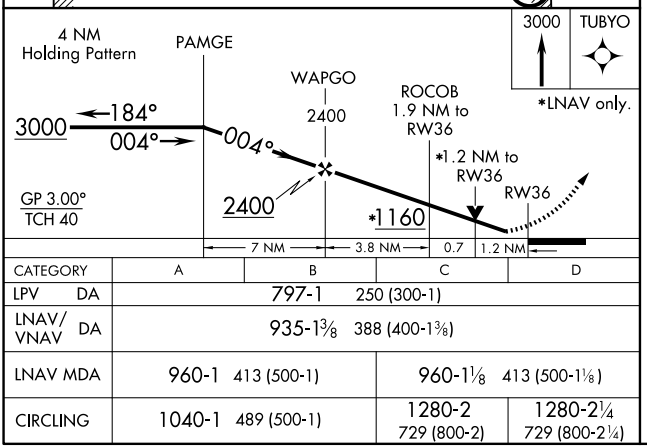

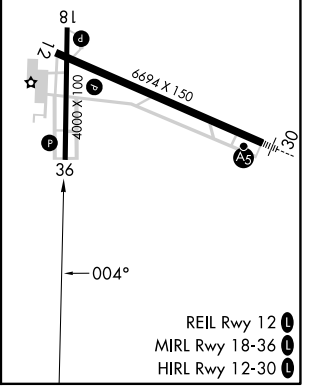

CATEGORY	A	B	C	D
LPV DA	797-1 250 (300-1)			
LNAV/VNAV DA	935-1⅜ 388 (400-1⅜)			
LNAV MDA	960-1 413 (500-1)		960-1⅛ 413 (500-1⅛)	
CIRCLING	1040-1 489 (500-1)		1280-2 729 (800-2)	1280-2¼ 729 (800-2¼)

REIL Rwy 12 L
MIRL Rwy 18-36 L
HIRL Rwy 12-30 L

SE-4, 26 NOV 2026 to 24 DEC 2026