DANLS FIVE DEPARTURE (RNAV)

(DANLS5.DANLS) 09JUL26

NASHVILLE, TENNESSEE
NASHVILLE INTL (BNA)


TOP ALTITUDE: 15000

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

NASHVILLE DEP CON
119.35 372.0
D-ATIS 135.1
CLNC DEL 126.05
CPDLC
GND CON
121.9 348.6
NASHVILLE TOWER
118.6 257.8

TAKEOFF MINIMUMS:
Rwy 13: Standard.
Rwys 2L/C/R, 20L/R: Standard with minimum climb of 500'/NM to 1099.
Rwy 20C: Standard with minimum climb of 500'/NM to 1300.
Rwy 31: Standard with minimum climb of 250'/NM to 3000.

NOTE: Jet aircraft only.

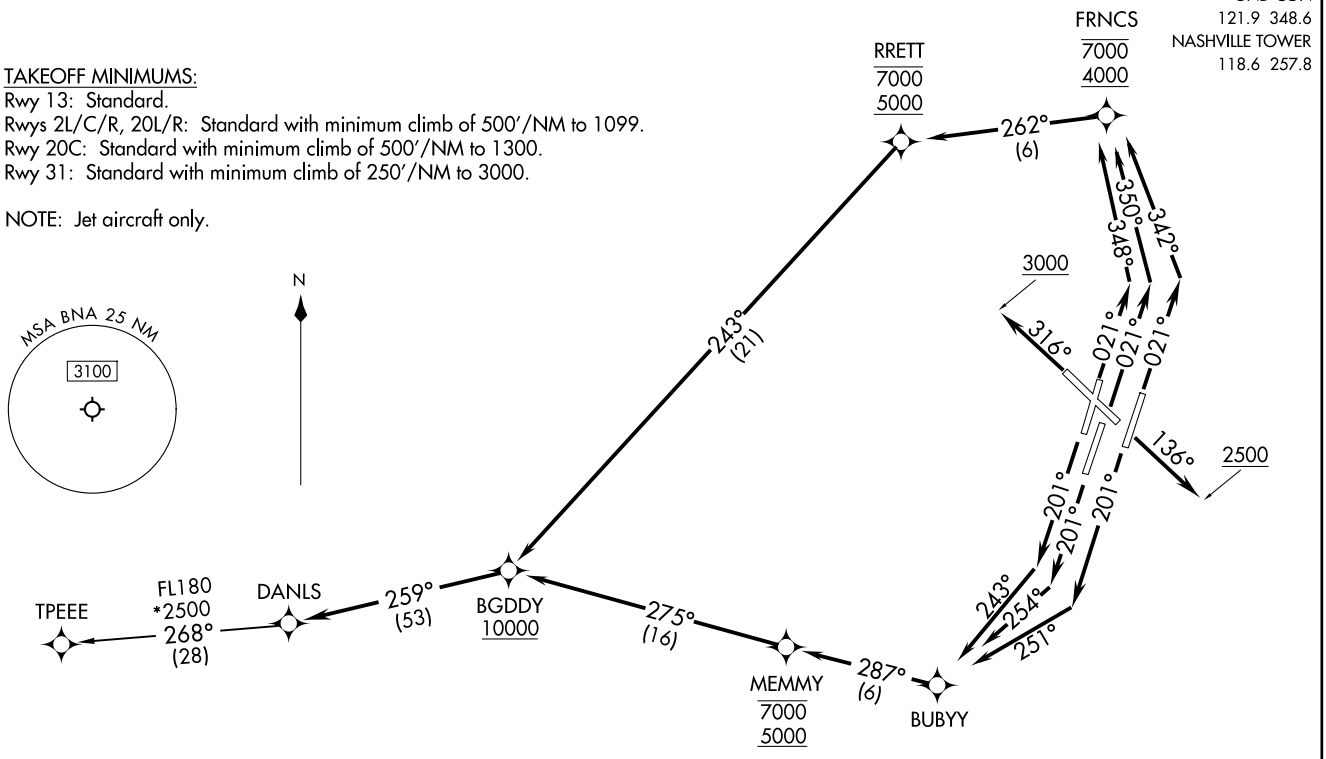

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

(DANLS5.DANLS) 26190

DANLS FIVE DEPARTURE (RNAV)

AL-282 (FAA)

NASHVILLE INTL (BNA)
NASHVILLE, TENNESSEE