WAAS	APP CRS	Rwy Ldg 5135
CH 86913	357°	TDZE 8
W36A		Apt Elev 8


RNAV (GPS) RWY 36L

LAKEFRONT (NEW)

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase LPV DA to 369 feet, LNAV/VNAV DA to 460 feet and all visibilities ⅛ mile; increase all MDA 40 feet and Circling Cat D visibility ¼ mile. VDP and Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting.


MISSED APPROACH: Climb to 2100 direct PNDAR and via track 064° to SNAKI and hold.

ATIS	NEW ORLEANS APP CON	LAKEFRONT TOWER ★	GND CON
124.9	133.15 290.3 (N) 123.85 256.9 (S)	118.95 (CTAF) L	121.7 335.575

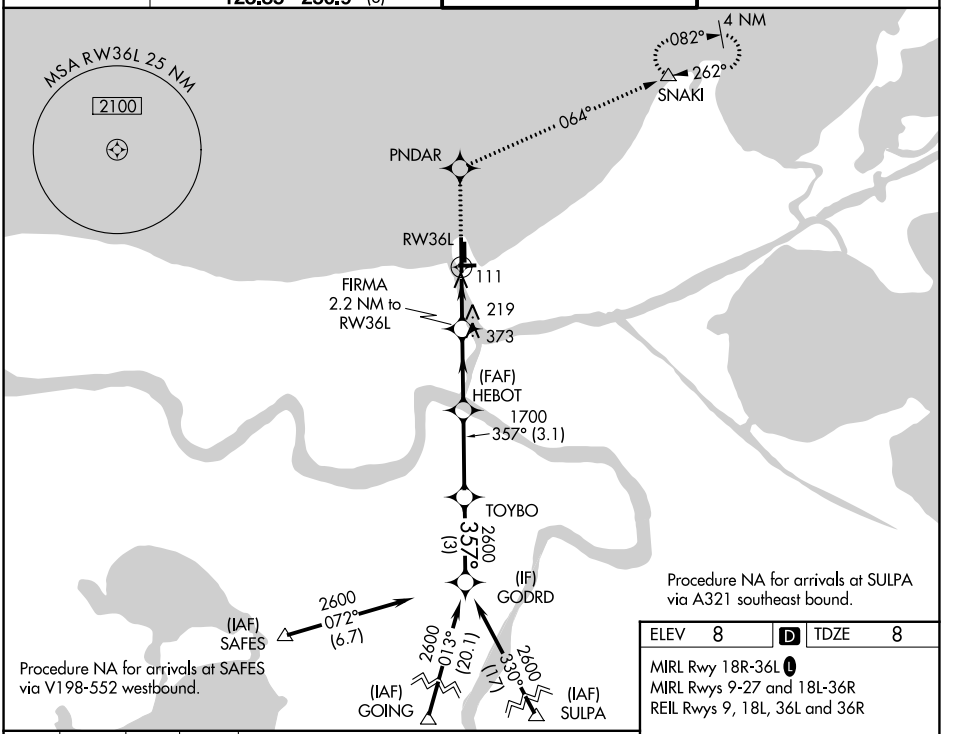


ELEV 8	D	TDZE 8

MIRL Rwy 18R-36L L
MIRL Rwys 9-27 and 18L-36R
REIL Rwys 9, 18L, 36L and 36R

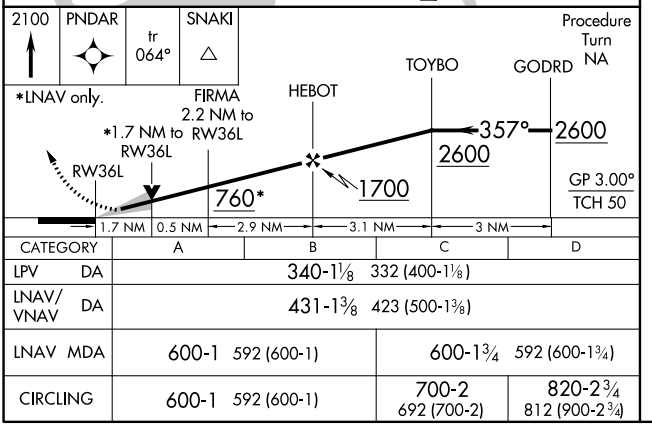

CATEGORY	A	B	C	D
LPV DA	340-1⅛ 332 (400-1⅛)			
LNAV/VNAV DA	431-1⅜ 423 (500-1⅜)			
LNAV MDA	600-1 592 (600-1)		600-1¾ 592 (600-1¾)	
CIRCLING	600-1 592 (600-1)		700-2 692 (700-2)	820-2¾ 812 (900-2¾)

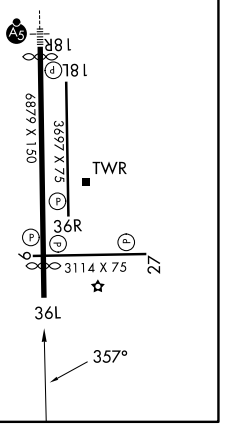

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026