
VORTAC HRV	APP CRS	Rwy Ldg 5135
114.1	351°	TDZE 8
Chan 88		Apt Elev 8

VOR/DME RWY 36L
LAKEFRONT (NEW)

Visibility reduction by helicopters NA.
When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase all MDA 40 feet and increase S-36L Cat C/D and Circling Cat D visibilities ¼ mile.


MISSED APPROACH: Climb to 2000 via HRV R-351 and RQR R-082 to SNAKI INT/RQR 36.6 DME and hold.


ATIS	NEW ORLEANS APP CON	LAKEFRONT TOWER *	GND CON
124.9	133.15 290.3 (N) 123.85 256.9 (S)	118.95 (CTAF) L	121.7 335.575

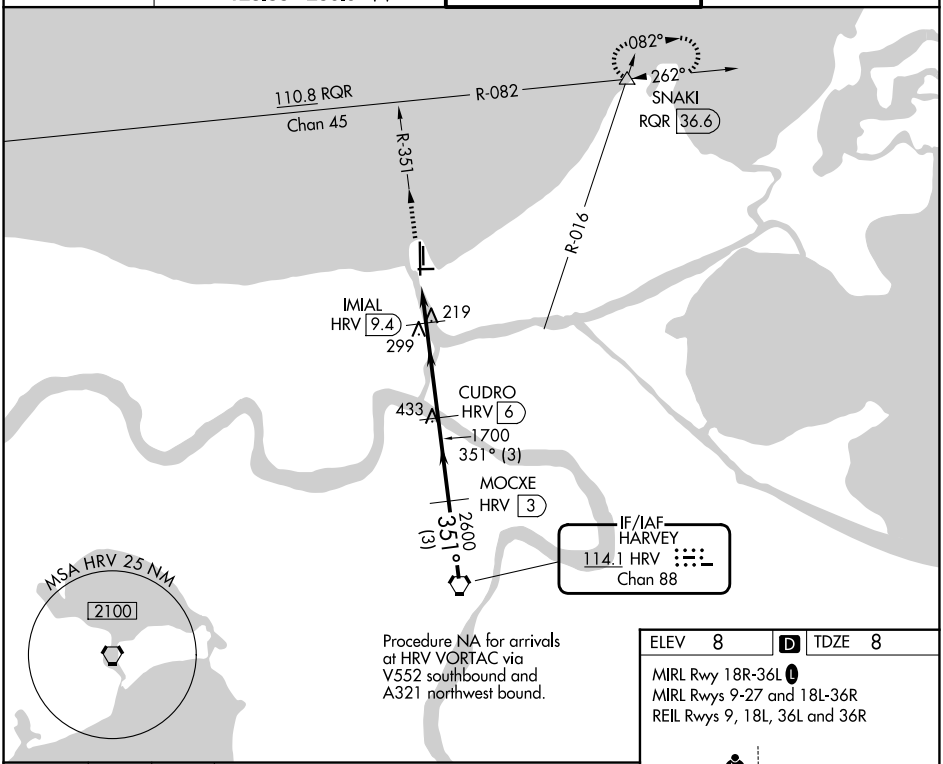

ELEV 8	D	TDZE 8

MIRL Rwy 18R-36L L
MIRL Rwys 9-27 and 18L-36R
REIL Rwys 9, 18L, 36L and 36R

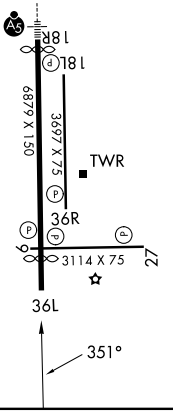

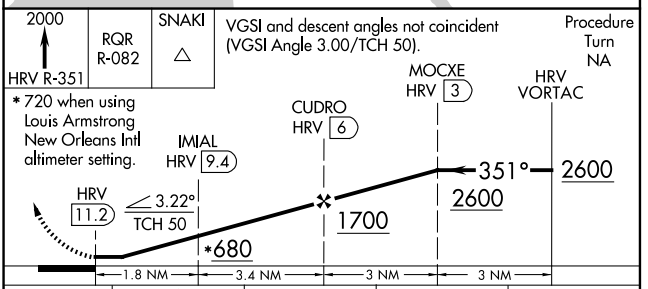

CATEGORY	A	B	C	D
S-36L	480-1 472 (500-1)		480-1¼ 472 (500-1¼)	480-1½ 472 (500-1½)
CIRCLING	520-1 512 (600-1)		700-2 692 (700-2)	820-2¾ 812 (900-2¾)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026