RNAV (GPS) RWY 22

NEW Ccentury AIRCENTER (IXD)


WAAS	APP CRS	Rwy Ldg	5132
CH 45739	223°	TDZE	1087
W22A		Apt Elev	1087

RNP APCH - GPS.


Baro-VNAV and VDP NA when using OJC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use OJC altimeter setting: increase LPV DA to 1355 feet and LNAV/VNAV DA to 1368 feet and all MDA 20 feet.

MISSED APPROACH: Climb to 3100 direct AXUXE and hold.


ASOS	KANSAS CITY APP CON	NEW CENTURY TOWER ★	GND CON	UNICOM
135.325	118.9 251.075	133.0 (CTAF) L	124.3	122.95

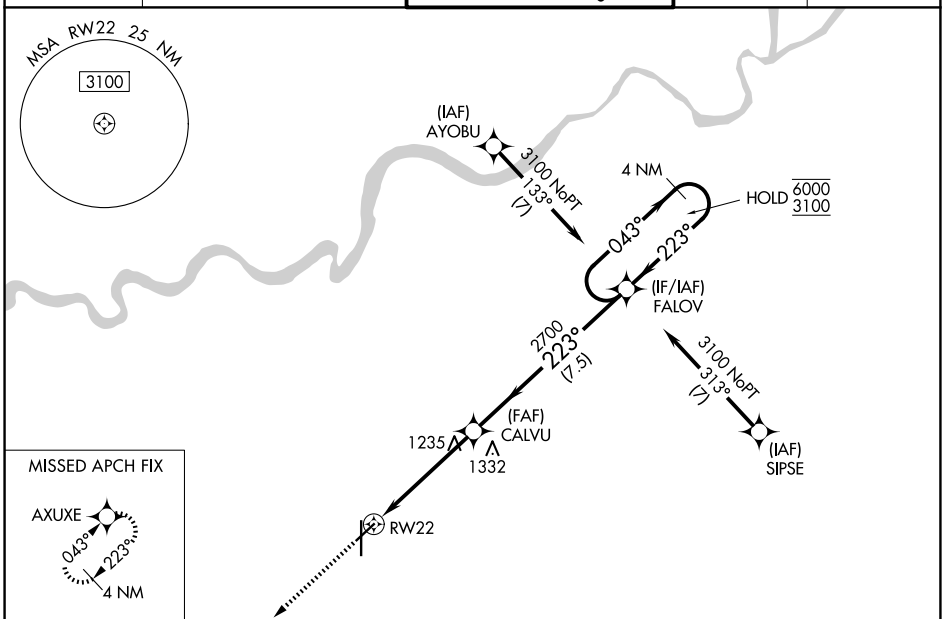

ELEV 1087 TDZE 1087



HIRL Rwy 18-36 L
MIRL Rwy 4-22 L
REIL Rwy 18 L

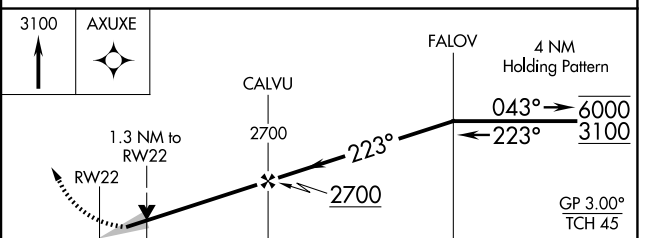

CATEGORY	A	B	C	D
LPV DA	1337-1	250 (300-1)		
LNAV/VNAV DA	1350-1	263 (300-1)		
LNAV MDA	1540-1	453 (500-1)	1540-1⅜	453 (500-1⅜)
CIRCLING	1560-1	473 (500-1)	1580-1½ 493 (500-1½)	1640-2 553 (600-2)

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026