RNAV (GPS) RWY 21

POCATELLO RGNL (PIH)

WAAS	APP CRS	Rwy Ldg	9059
CH 78212	211°	TDZE	4452
W21A		Apt Elev	4452


RNP APCH - GPS.

T A Circling NA southeast of Rwy 3-21. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR A5


MISSED APPROACH: Climb to 7000 direct HUMBA and track 273° to SICOY and hold.

ATIS	SALT LAKE CENTER	POCATELLO TOWER*	GND CON	UNICOM
135.625	128.35 239.25	119.1 (CTAF) L 257.8	121.9	122.95

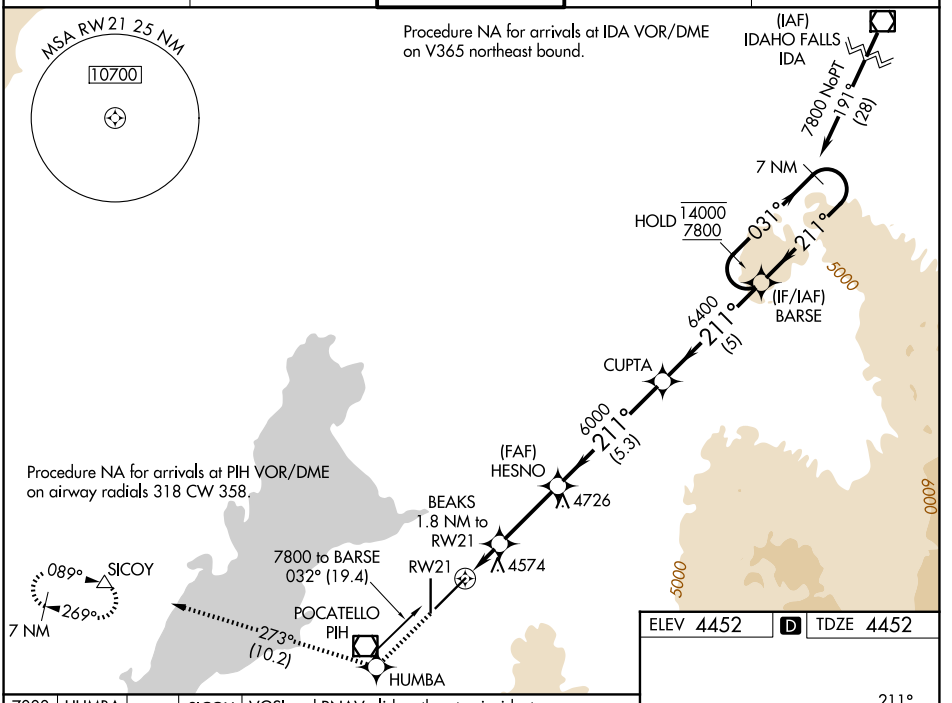


7000	HUMBA	tr 273°	SICOY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).

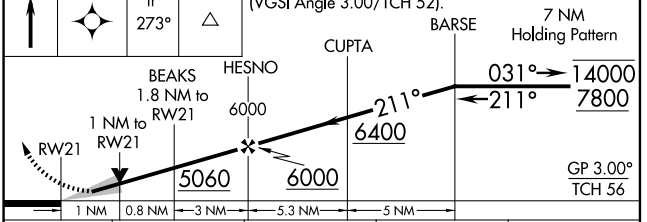

CATEGORY	A	B	C	D
LPV DA*	4652/24 200 (200-½)			
LNAV/VNAV DA	4835/35 383 (400-⅝)			
LNAV MDA	4820/24 368 (400-½)		4820/35 368 (400-⅝)	
CIRCLING	4860-1 408 (500-1)	4920-1 468 (500-1)	4920-1½ 468 (500-1½)	5020-2 568 (600-2)

ELEV 4452 D TDZE 4452

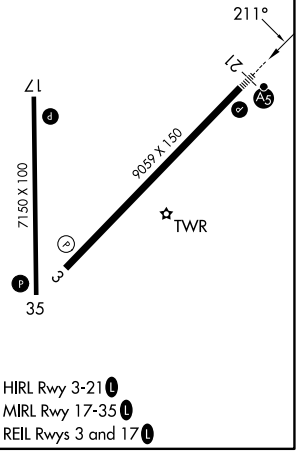

HIRL Rwy 3-21 L
MIRL Rwy 17-35 L
REIL Rwys 3 and 17 L

NW-1, 26 NOV 2026 to 24 DEC 2026