RNAV (RNP) Z RWY 35L

RENO/TAHOE INTL (RNO)

APP CRS	Rwy Ldg	10011
347°	TDZE	4410
	Apt Elev	4415


RNP AR APCH - GPS, min RNP 0.30. Authorization required.


T A -13° C For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 35°C.

MALSR

MISSED APPROACH: Climb to 11000 on track 347° to TAKLE and hold, continue climb-in-hold to 11000. # Missed approach requires minimum climb of 216 feet per NM to 7200. *Missed approach requires minimum climb of 301 feet per NM to 7200.

D-ATIS	NORCL APP CON	RENO TOWER	GND CON
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6

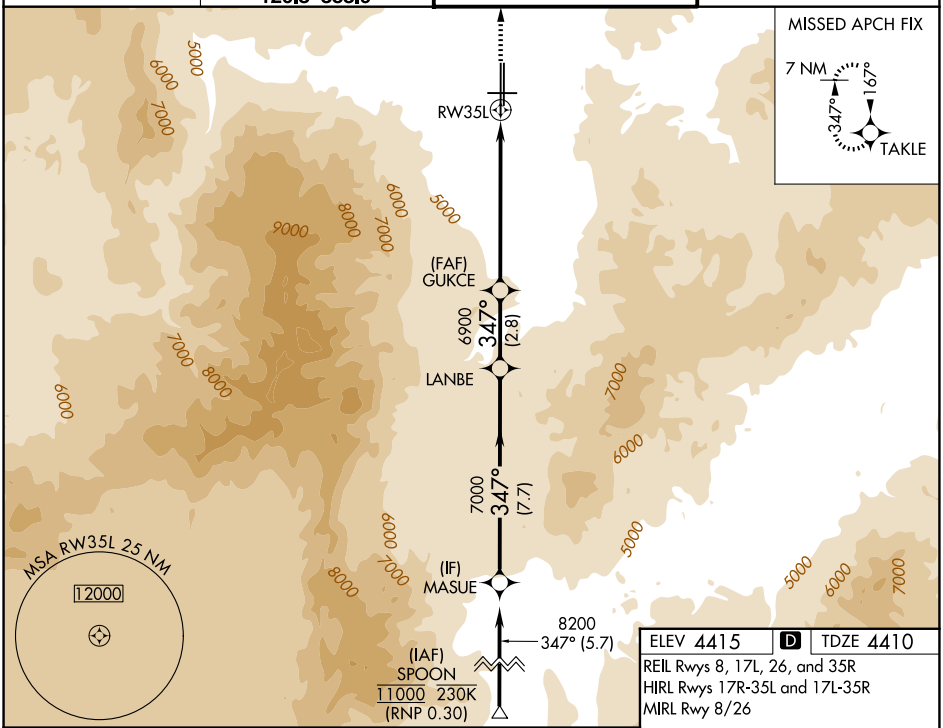

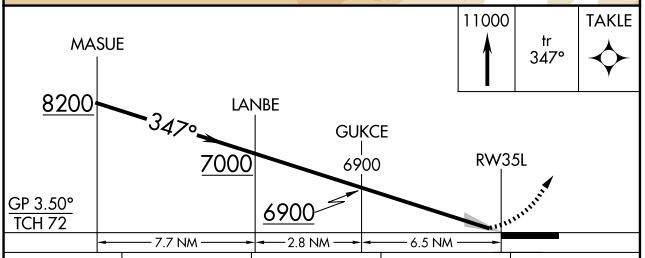


11000	tr 347°	TAKLE

ELEV 4415 D TDZE 4410

REIL Rwys 8, 17L, 26, and 35R

HIRL Rwys 17R-35L and 17L-35R

MIRL Rwy 8/26

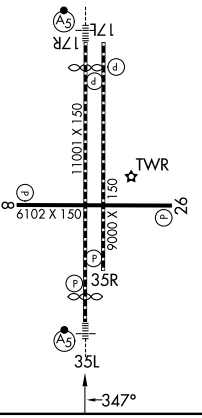

CATEGORY	A	B	C	D
RNP 0.10 DA*		4753-⅝	343 (400-⅝)	
RNP 0.20 DA#		5193-1¾	783 (800-1¾)	
RNP 0.30 DA		5353-2	943 (1000-2)	

AUTHORIZATION REQUIRED

SW-4, 26 NOV 2026 to 24 DEC 2026
SW-4, 26 NOV 2026 to 24 DEC 2026