WAAS CH 45611 W04A	APP CRS 044°	Rwy Ldg 8001 TDZE 535 Apt Elev 559

RNAV (GPS) RWY 4

FREDERICK DOUGLASS/GREATER ROCHESTER INTL (ROC)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1⅞ SM.


ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct BILAW and hold.


ATIS	ROCHESTER APP CON	ROCHESTER TOWER	GND CON
124.825	119.55 269.6	118.3 254.3	121.7

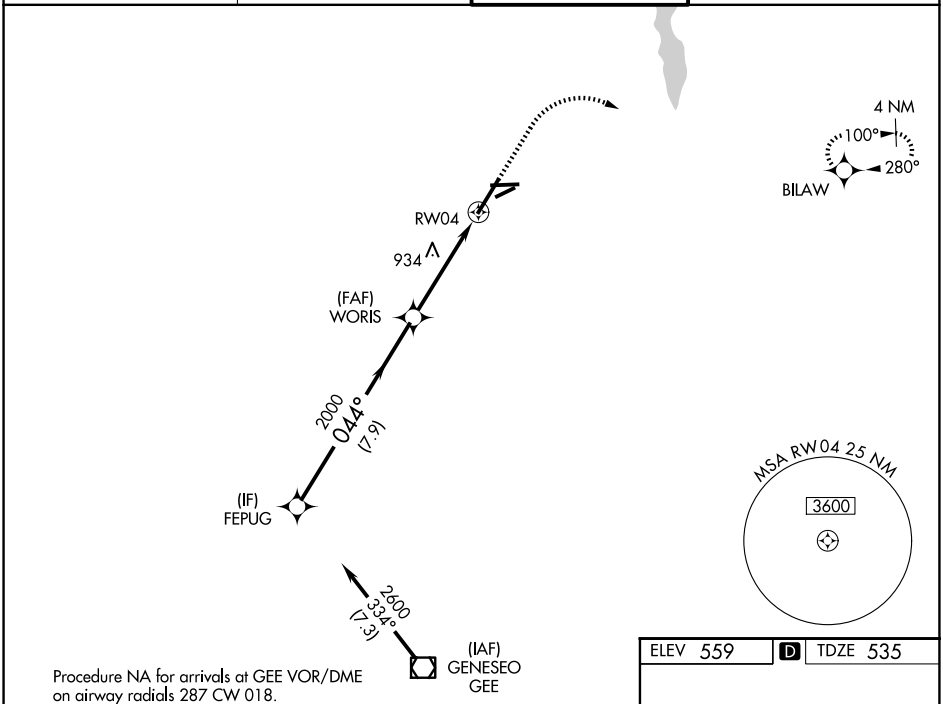

ELEV 559 D TDZE 535

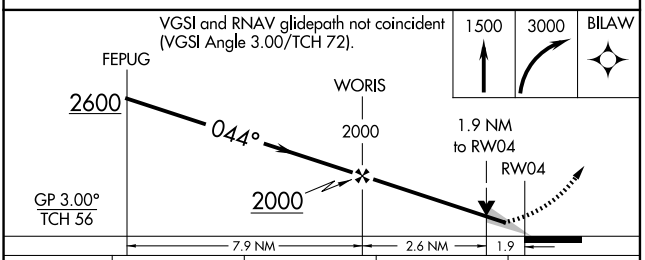

CATEGORY	A	B	C	D
LPV DA	735/18 200 (200-½)			
LNAV/VNAV DA	1290-2¼ 755 (800-2¼)			
LNAV MDA	1200/24 665 (700-½)		1200-1½ 665 (700-1½)	
CIRCLING	1200-1 641 (700-1)		1500-2¾ 941 (1000-2¾)	1500-3 941 (1000-3)



TDZ/CL Rwy 4
REIL Rwys 7, 10 and 25
MIRL Rwy 7-25
HIRL Rwys 10-28 and 4-22

NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026