RNAV (GPS) Y RWY 4

SAN ANTONIO INTL (SAT)

WAAS CH 77613 W04A	APP CRS 037°	Rwy Ldg 8505 / TDZE 786 / Apt Elev 809


RNP APCH - GPS.

Circling NA northwest of Rwys 4 and 13R. Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000. Increase LNAV Cats A/B visibility to RVR 5500 and LNAV Cats C/D visibility to 1⅜ SM.


MALS

MISSED APPROACH: Climb to 3500 direct BISGE and track 030° to SHEPE and hold.


D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON
118.9	125.1 307.0	119.8 257.8	121.9 348.6

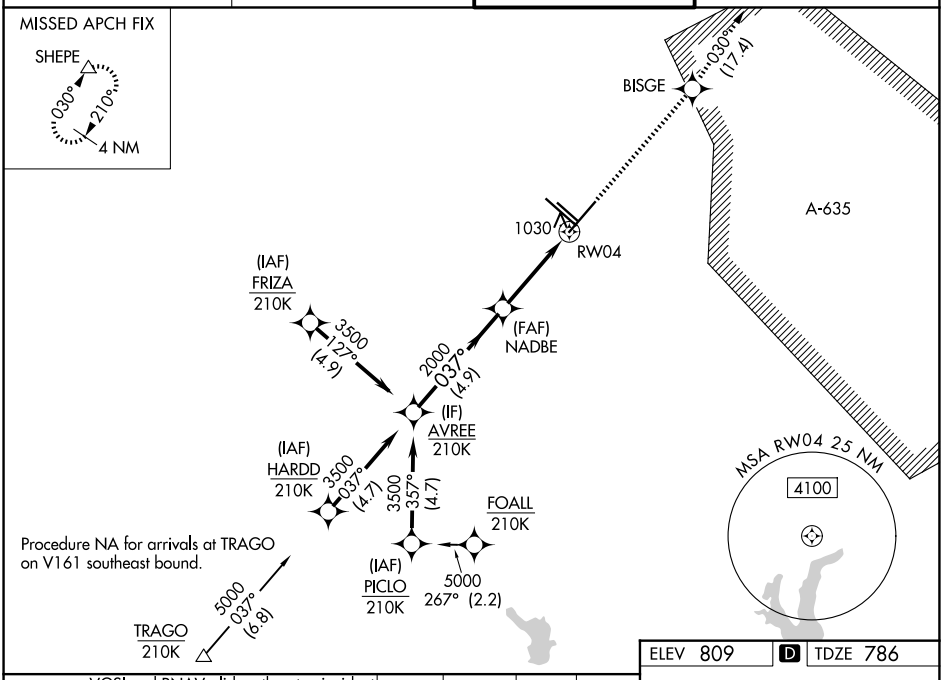

ELEV 809 D TDZE 786

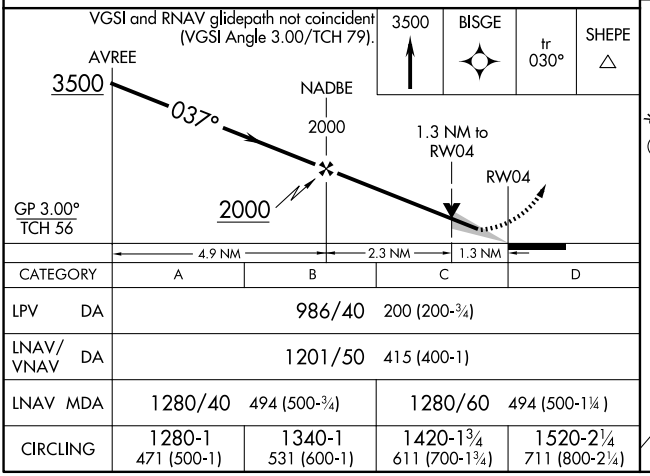

CATEGORY	A	B	C	D
LPV DA	986/40 200 (200-¾)			
LNAV/VNAV DA	1201/50 415 (400-1)			
LNAV MDA	1280/40 494 (500-¾)		1280/60 494 (500-1¼)	
CIRCLING	1280-1 471 (500-1)	1340-1 531 (600-1)	1420-1¾ 611 (700-1¾)	1520-2¼ 711 (800-2¼)

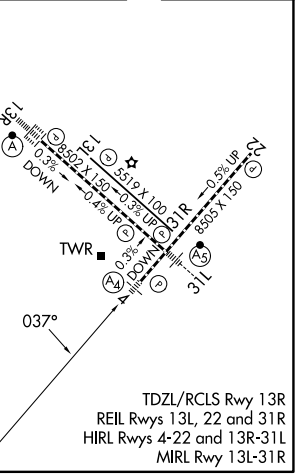

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026