RNAV (GPS) RWY 3

JOE FOSS FLD (FSD)

WAAS CH 97722 W03A	APP CRS 030°	Rwy Ldg 8999 TDZE 1424 Apt Elev 1430

RNP APCH - GPS.


ASR -30°C


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to 1⅜ SM.

MALSR


MISSED APPROACH: Climb to 4000 direct MOPUE and hold.

ATIS	SIOUX FALLS APP CON★	SIOUX FALLS TOWER★	GND CON	UNICOM
126.6	125.8 284.725	118.3 (CTAF) L 257.8	121.9 348.6	122.95

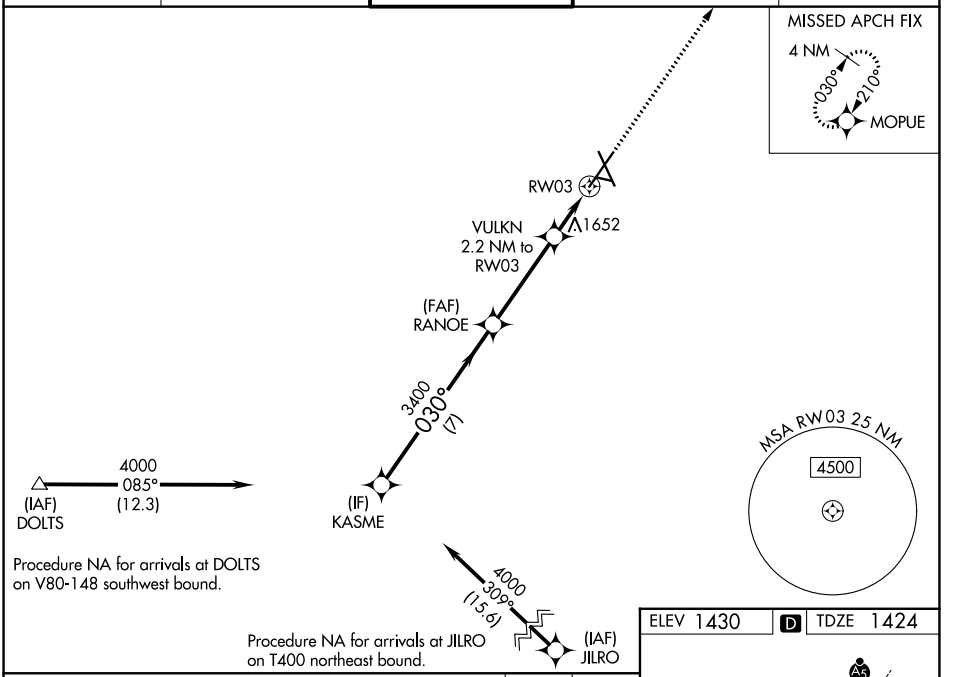

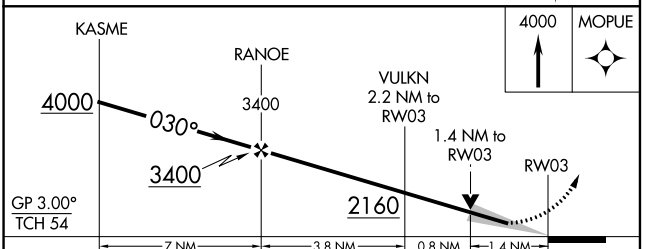

CATEGORY	A	B	C	D
LPV DA	1674/24 250 (300-½)			
LNAV/VNAV DA	1741/24 317 (400-½)			
LNAV MDA	1920/24 496 (500-½)		1920/50 496 (500-1)	
CIRCLING	1980-1 550 (600-1)		2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)

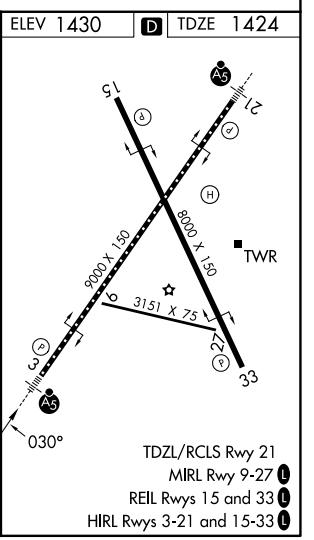

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026