RNAV (GPS) RWY 32

WACO RGNL (ACT)

WAAS	APP CRS	Rwy Ldg	5103
CH 69420	322°	TDZE	516
W32A		Apt Elev	516

DME/DME RNP-0.3 NA. When local altimeter setting not received use Mc Gregor Exec altimeter setting and increase all DA 31 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ mile and Circling Cat D visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 54°C (130°F). Baro-VNAV NA when using Mc Gregor Exec altimeter setting. VDP NA with Mc Gregor Exec altimeter setting.

ASR

MISSED APPROACH: Climb to 4000 direct EVVIS and hold, continue climb-in-hold to 4000.

ATIS	WACO APP CON ★	WACO TOWER ★	GND CON	UNICOM
123.85	127.65 227.125	119.3 (CTAF) L 257.8	121.9	122.95

MISSED APCH FIX

4 NM 142° 322° EVVIS

RW32 608 IWIFY 1.9 NM to RW32

1021

(FAF) SKOCH

2100 322° (6.7)

(IF) ILINI

3000 263° (8) (IAF) PRKRR

3000 012° (8)

3000 308° (6.7) (IAF) SATTY

KOCYU

3600 012° (6.4) (IAF) BARES

Procedure NA for arrivals at DRILL on V15-54 northeast bound.


DRILL 3000 190° (28.8)


Procedure NA for arrivals at SATTY on V15 southeast bound.

Procedure NA for arrivals at BARES on V548 southbound.

MSA RW32 25 NM 3600

ELEV 516 D TDZE 516

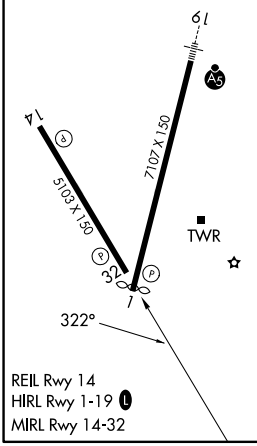

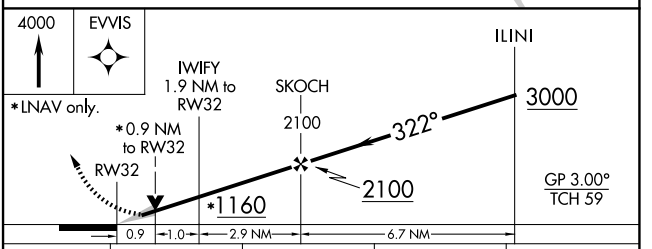

CATEGORY	A	B	C	D
LPV DA	766-¾ 250 (300-¾)			
LNAV/VNAV DA	773-¾ 257 (300-¾)			
LNAV MDA	860-1 344 (400-1)			
CIRCLING	940-1 424 (500-1)	980-1 464 (500-1)	1020-1½ 504 (600-1½)	1160-2 644 (700-2)

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026