MIGGY THREE DEPARTURE (RNAV)

(MIGGY3.MIGGY) 16MAY24

DETROIT, MICHIGAN


WILLOW RUN (YIP)

TOP ALTITUDE: ASSIGNED BY ATC


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

ATIS 127.425
GND CON 119.975
WILLOW RUN TOWER 125.275 256.9
DETROIT DEP CON 118.95 284.0

NOTE: Jet departures at/above 10000, maintain 280K until advised by ATC.
NOTE: GETCH TRANSITION: For use by KMKE area arrivals only, or as assigned by ATC.

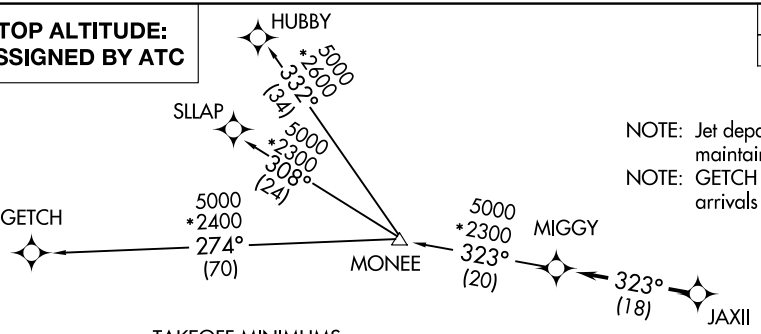

TAKEOFF MINIMUMS:
Rwy 23: Standard.
Rwys 5, 9: Standard with minimum climb of 500′ per NM to 1220.
Rwy 27: Standard with minimum climb of 209′ per NM to 1000.

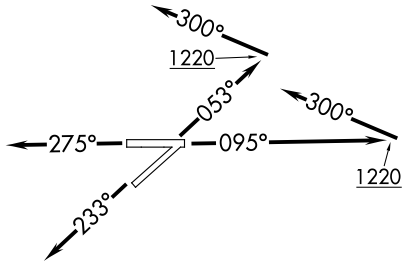



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 5: Climb on heading 053° to 1220, then on heading 300° or as assigned by ATC, for RADAR vectors to JAXII, thence....
TAKEOFF RUNWAY 9: Climb on heading 095° to 1220, then on heading 300° or as assigned by ATC, for RADAR vectors to JAXII, thence....
TAKEOFF RUNWAY 23: Climb on heading 233° or as assigned by ATC, for RADAR vectors to JAXII, thence....
TAKEOFF RUNWAY 27: Climb on heading 275° or as assigned by ATC, for RADAR vectors to JAXII, thence....

....on track 323° to MIGGY, then on (transition). Maintain 17000 or as assigned by ATC, expect filed altitude 10 minutes after departure.

GETCH TRANSITION (MIGGY3.GETCH):
HUBBY TRANSITION (MIGGY3.HUBBY):
SLLAP TRANSITION (MIGGY3.SLLAP):





NOTE: Chart not to scale.

(MIGGY3.MIGGY) 24137

MIGGY THREE DEPARTURE (RNAV) AL-467 (FAA)

WILLOW RUN (YIP)

DETROIT, MICHIGAN