RNAV (GPS) RWY 10

CAPE MAY COUNTY (WWD)


WAAS	APP CRS	Rwy Ldg	5000
CH 93541	100°	TDZE	18
W10A		Apt Elev	22

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. Circling NA for Cats C and D northeast of Rwys 19 and 28. Rwy 10 helicopter visibility reduction below ¾ SM NA. Circling Rwy 1 NA at night.

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SIE VORTAC and hold.


AWOS-3PT	ATLANTIC CITY APP CON	CLNC DEL	UNICOM
118.275	124.6 327.125	121.7	122.7 (CTAF) L

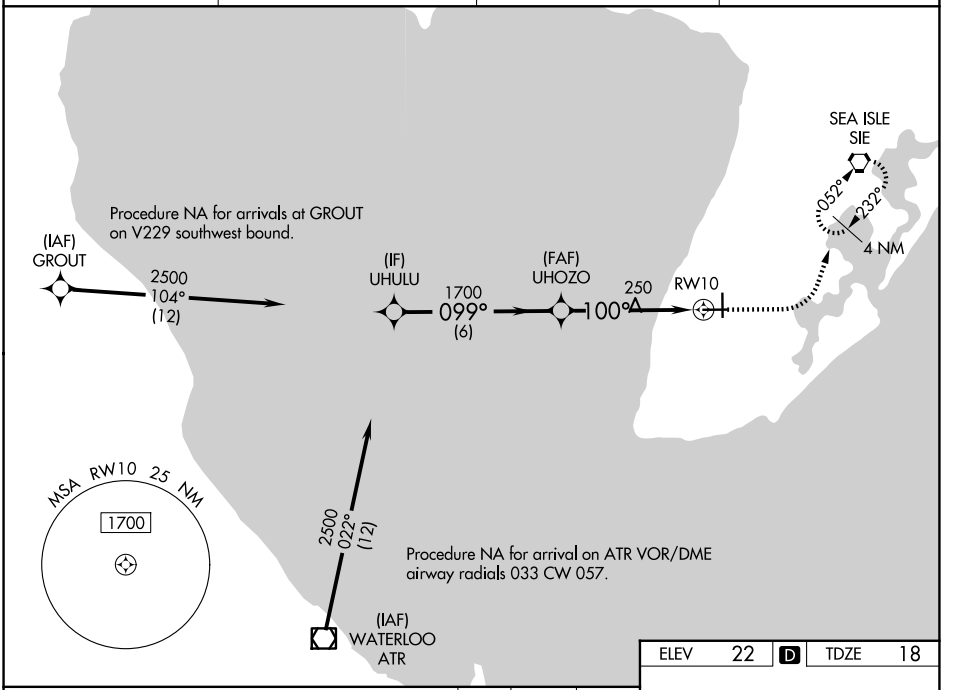

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).


500 | 2000 | SIE

* LNAV only

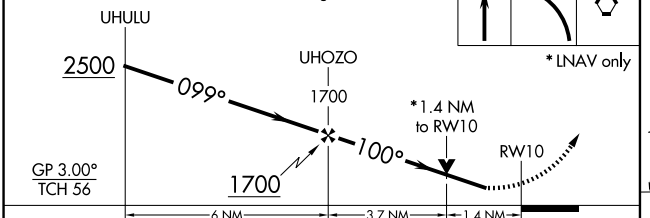

CATEGORY	A	B	C	D
LPV DA	285-⅞ 267 (300-⅞)			
LNAV/VNAV DA	336-1 318 (400-1)			
LNAV MDA	500-1 482 (500-1)		500-1⅜ 482 (500-1⅜)	
CIRCLING	500-1 478 (500-1)	620-1 598 (600-1)	620-1½ 598 (600-1½)	980-3 958 (1000-3)

ELEV 22 D TDZE 18



HIRL Rwy 1-19 L

MIRL Rwy 10-28 L

NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026