FAIRFIELD, CALIFORNIA

ILS RWY 21L (CAT II)

TRAVIS AFB (KSUU)

LOC I-SUU	APCH CRS	Rwy Idg 10,995 / TDZE 58 / Arpt Elev 63
110.1	215°	[USAF]

RNAV1 - GPS or RADAR required


RADAR required for CAT E aircraft for full procedure off of SEATO.

ALSF-2

MISSED APPROACH: Climb to 2200 then climbing right turn to 4500 direct SEATO and hold, continue climb in hold to 4500.


ATIS	APP CON	TOWER	GND CON
135.55 292.125	119.9 322.325 (S) 126.6 281.45 (N)	120.75 254.4	121.8 289 4

CATEGORY II ILS SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

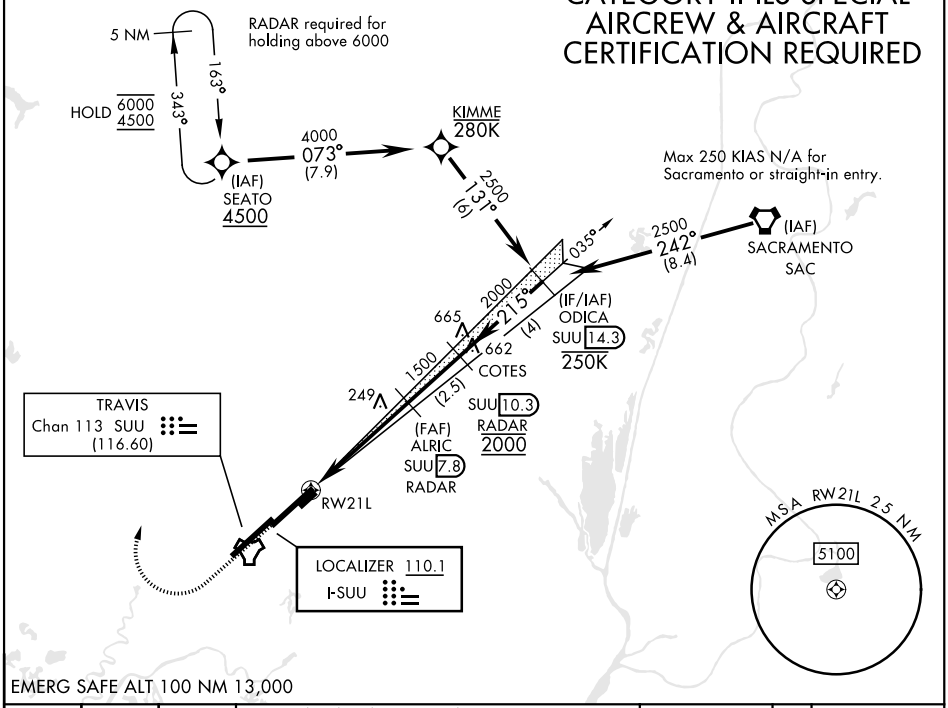


2200 | 4500 | SEATO

VGSI and glidepath not coincident (VGSI Angle 2.80/TCH 75).

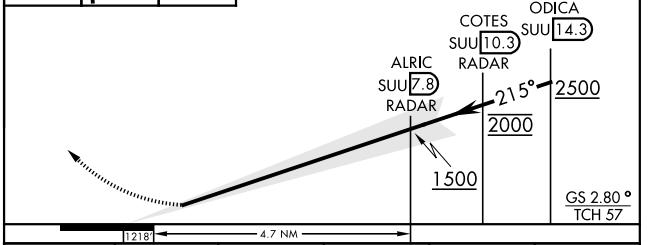

CATEGORY	A	B	C	D	E
S-ILS 21L	RA 83/12	100	DA 158		

ELEV 63 | TDZE 58



HIRL Rwy 3L-21R, 3R-21L
TDZL/RCLS Rwy 3R, 21L

FAIRFIELD, CALIFORNIA — 38°16'N-121°55'W — TRAVIS AFB (KSUU)

Orig 19MAY22

ILS RWY 21L (CAT II)

SW-2, 26 NOV 2026 to 24 DEC 2026