WAAS CH 72905 W04A	APP CRS 039°	Rwy Ldg 5000 TDZE 2885 Apt Elev 2885

RNAV (GPS) RWY 4


LIBERAL MID-AMERICA RGNL (LBL)


RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Circling NA east of Rwy 17-35. When local altimeter setting not received, use GUY altimeter setting and increase LPV DA to 3248 feet; increase LNAV/VNAV DA to 3412 feet and all visibilities ⅜ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ¼ SM. Baro-VNAV and VDP NA when using GUY altimeter setting.

MISSED APPROACH: Climb to 4800 direct NULEE and hold.


AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.375	134.0 257.625	122.8 (CTAF) L

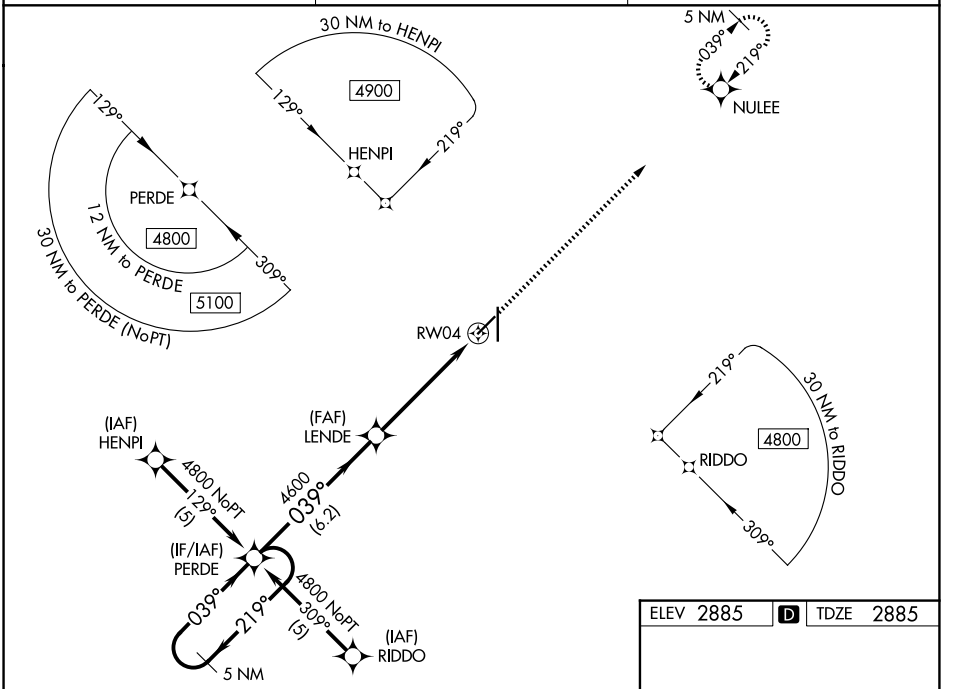

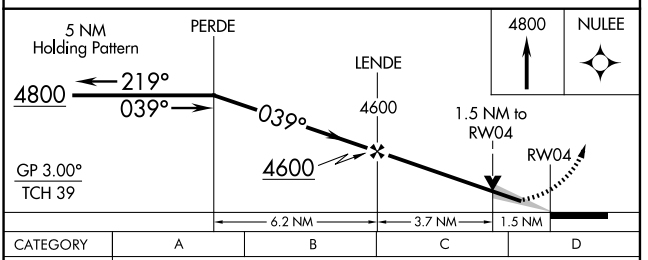

CATEGORY	A	B	C	D
LPV DA	3136-1 251 (300-1)			
LNAV/VNAV DA	3300-1⅜ 415 (500-1⅜)			
LNAV MDA	3400-1 515 (600-1)		3400-1⅜ 515 (600-1⅜)	
CIRCLING	3400-1 515 (600-1)		3400-1½ 515 (600-1½)	3640-2½ 755 (800-2½)

ELEV 2885 D TDZE 2885



REIL Rwys 4, 17 and 22 L
MIRL Rwy 4-22 L
HIRL Rwy 17-35 L

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026