RNAV (GPS) RWY 17

PRATT RGNL (PTT)


WAAS	APP CRS	Rwy Ldg	5500
CH 99607	173°	TDZE	1952
W17A		Apt Elev	1953

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use GBD altimeter setting: increase LPV DA to 2301 feet; increase LNAV/VNAV DA to 2356 feet and all visibilities ⅛ SM; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using GBD altimeter setting.

MISSED APPROACH: Climb to 4300 direct ZUSKI and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.725	118.8 322.425	122.8 (CTAF) L

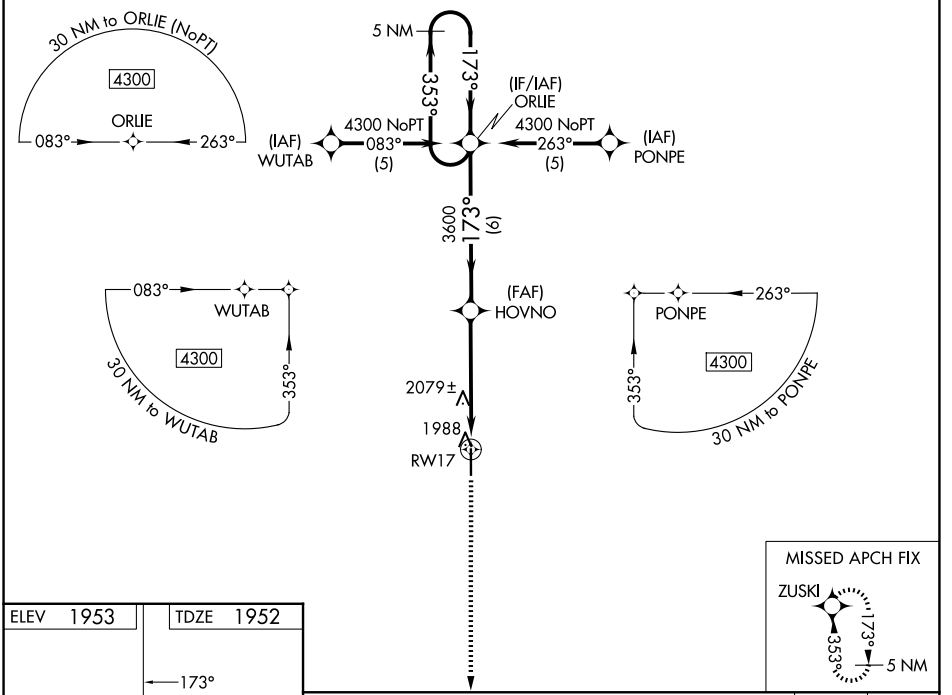

CATEGORY	A	B	C	D
LPV DA	2202-1 250 (300-1)			NA
LNAV/VNAV DA	2257-1 305 (400-1)			NA
LNAV MDA	2340-1 388 (400-1)		2340-1⅛ 388 (400-1⅛)	NA
CIRCLING	2380-1 427 (500-1)	2420-1 467 (500-1)	2580-1¾ 627 (700-1¾)	NA

REIL Rwys 17 and 35 L
MIRL Rwy 17-35 L

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026