# ILS or LOC RWY 22

EVANSVILLE RGNL (EVV)

| LOC/DME I-EVV | APP CRS | Rwy Ldg | 8021 |
|---|---|---|---|
| 109.9 | 221° | TDZE | 422 |
| Chan 36 | | Apt Elev | 422 |

RADAR or DME required for procedure entry at AUGUS.


Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.


ASR

MALSR


MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

| ATIS | EVANSVILLE APP CON * | EVANSVILLE TOWER * | GND CON | UNICOM |
|---|---|---|---|---|
| 120.2 | 124.025 290.9 | 118.7 (CTAF) L 257.8 | 121.9 | 122.95 |

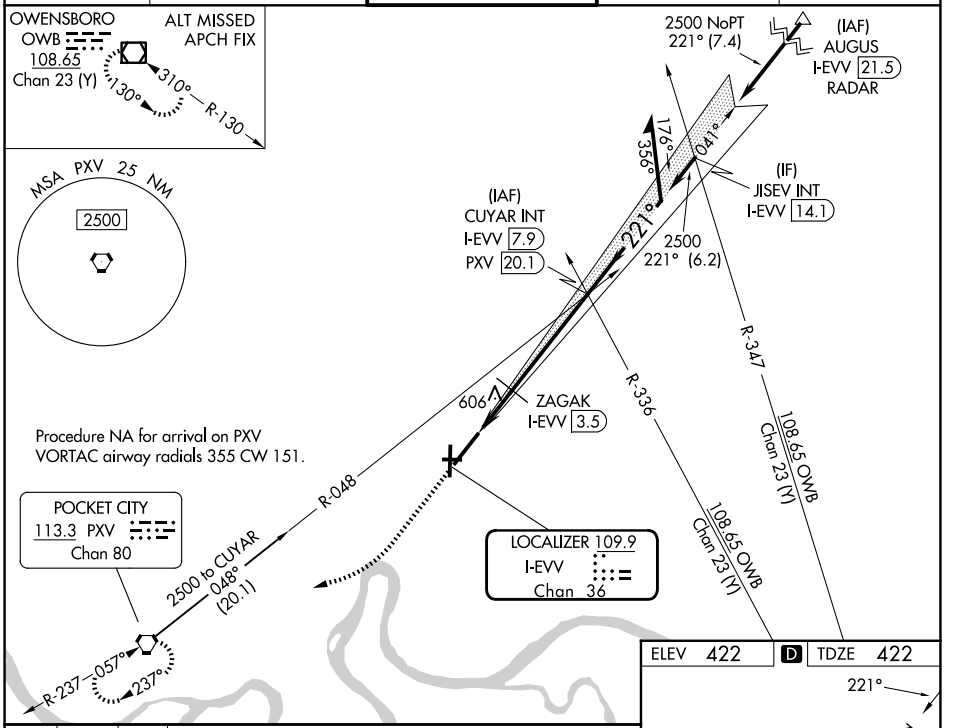

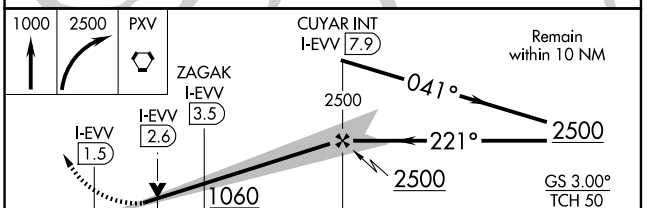
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 22 * | 622/24 200 (200-½) | | | |
| S-LOC 22 | 1060/24 638 (700-½) | | 1060-1⅜ 638 (700-1⅜) | |
| CIRCLING | 1060-1 638 (700-1) | | 1060-1¾ 638 (700-1¾) | 1060-2 638 (700-2) |
| ZAGAK FIX MINIMUMS (DME REQUIRED) | | | | |
| S-LOC 22 | 840/24 418 (500-½) | | 840/40 418 (500-¾) | |
| CIRCLING | 920-1 498 (500-1) | 1040-1 618 (700-1) | 1040-1¾ 618 (700-1¾) | 1040-2 618 (700-2) |

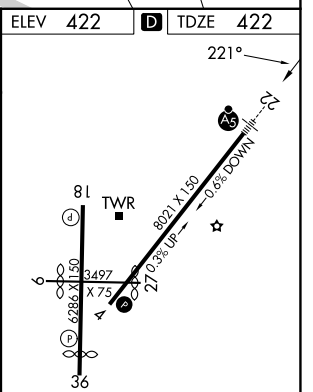


HIRL Rwys 4-22 and 18-36 L
REIL Rwys 4, 18, and 36 L
MIRL Rwy 9-27 L

FAF to MAP 6.4 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 6:24 | 4:16 | 3:12 | 2:34 | 2:08 |



EC-2, 26 NOV 2026 to 24 DEC 2026
EC-2, 26 NOV 2026 to 24 DEC 2026