RNAV (GPS) RWY 22

EVANSVILLE RGNL (EVV)


WAAS CH 42512 W22A	APP CRS 221°	Rwy Ldg 8021 TDZE 422 Apt Elev 422


ASR — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling Rwy 9 NA at night.
** RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 2500 direct ICINU and hold.

ATIS	EVANSVILLE APP CON ★	EVANSVILLE TOWER ★	GND CON	UNICOM
120.2	124.025 290.9	118.7 (CTAF) L 257.8	121.9	122.95

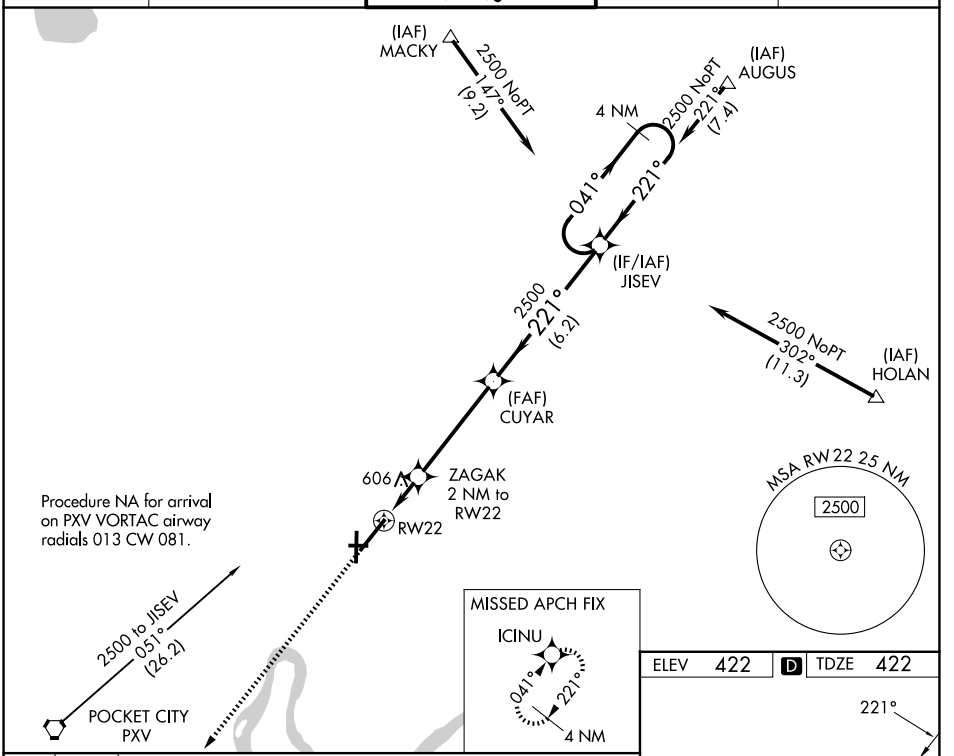

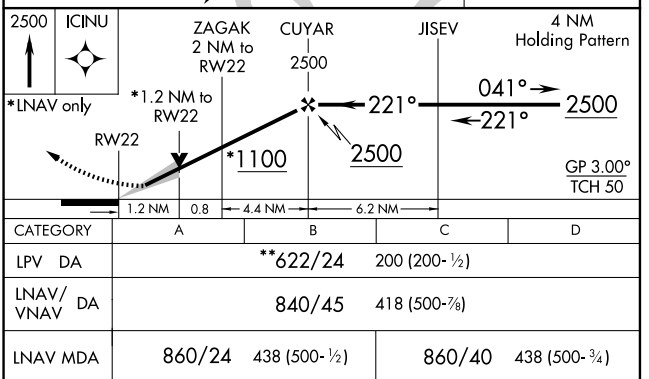

CATEGORY	A	B	C	D
LPV DA	**622/24	200 (200-½)		
LNAV/VNAV DA	840/45	418 (500-⅞)		
LNAV MDA	860/24	438 (500-½)	860/40	438 (500-¾)
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)

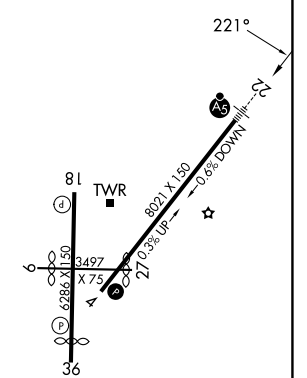

HIRL Rwys 4-22 and 18-36 L
REIL Rwys 4, 18, and 36 L
MIRL Rwy 9-27 L

EC-2, 26 NOV 2026 to 24 DEC 2026
EC-2, 26 NOV 2026 to 24 DEC 2026