
WAAS	APP CRS	Rwy Ldg	4999
CH 69327	333°	TDZE	108
W33A		Apt Elev	120

RNAV (GPS) RWY 33
NORTHEAST PHILADELPHIA (PNE)


Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 430 feet and LNAV/VNAV DA to 450 feet and all LPV and LNAV/VNAV visibilities ⅛ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2500 direct PACKS and on track 003° to MAZIE and hold.


ATIS	PHILADELPHIA APP CON	NORTHEAST PHILADELPHIA TOWER ★	GND CON	UNICOM
121.15	123.8 291.7	126.9 (CTAF) L 278.8	121.7	122.95

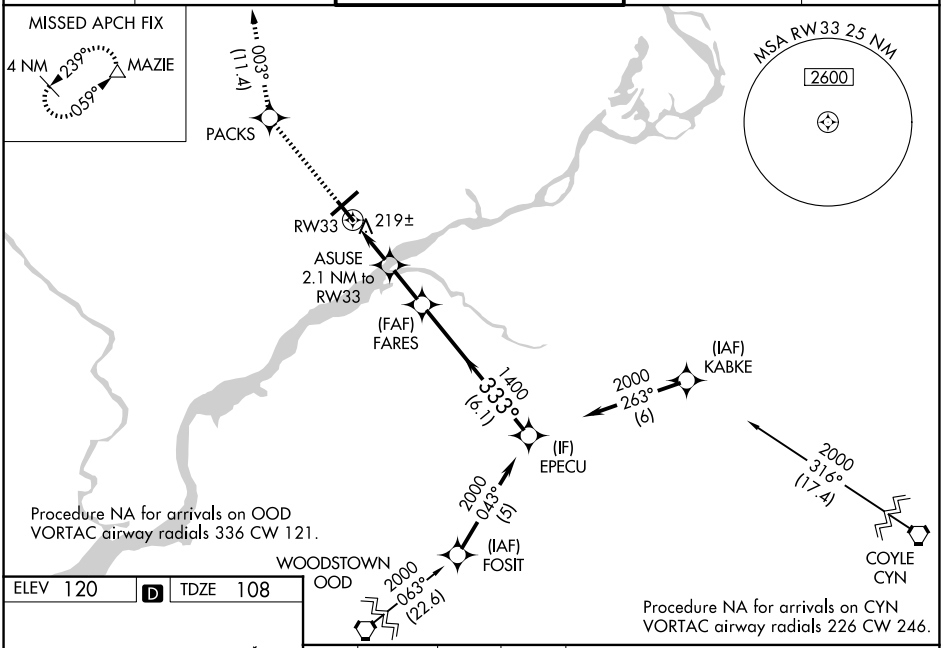

ELEV 120 D TDZE 108

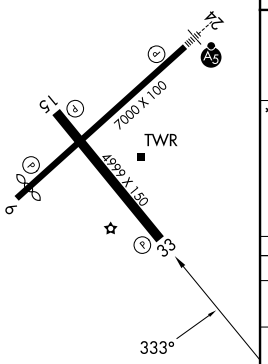

HIRL Rwy 6-24
MIRL Rwy 15-33
REIL Rwys 6, 15 and 33

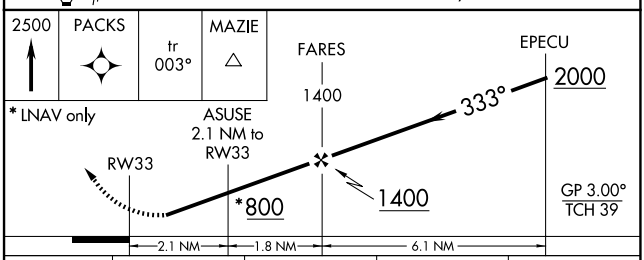

CATEGORY	A	B	C	D
LPV DA	380-1	272 (300-1)		
LNAV/VNAV DA	400-1	292 (300-1)		
LNAV MDA	480-1	372 (400-1)		
CIRCLING	700-1 580 (600-1)		720-1½ 600 (600-1½)	780-2 660 (700-2)

NE-4, 26 NOV 2026 to 24 DEC 2026
NE-4, 26 NOV 2026 to 24 DEC 2026