# RNAV (GPS) RWY 18

JOPLIN RGNL (JLN)

| WAAS | APP CRS | Rwy Ldg | 6499 |
|---|---|---|---|
| CH 97309 | 178° | TDZE | 965 |
| W18A | | Apt Elev | 978 |


RNP APCH.


For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). For inoperative MALSR, increase LPV all Cats visibility to RVR 5000.


MALSR

MISSED APPROACH: Climb to 3100 direct JEMLO and hold.

| ATIS | KANSAS CITY CENTER | JOPLIN TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 120.85 | 128.6 282.325 | 119.8 (CTAF) L | 121.6 | 122.95 |

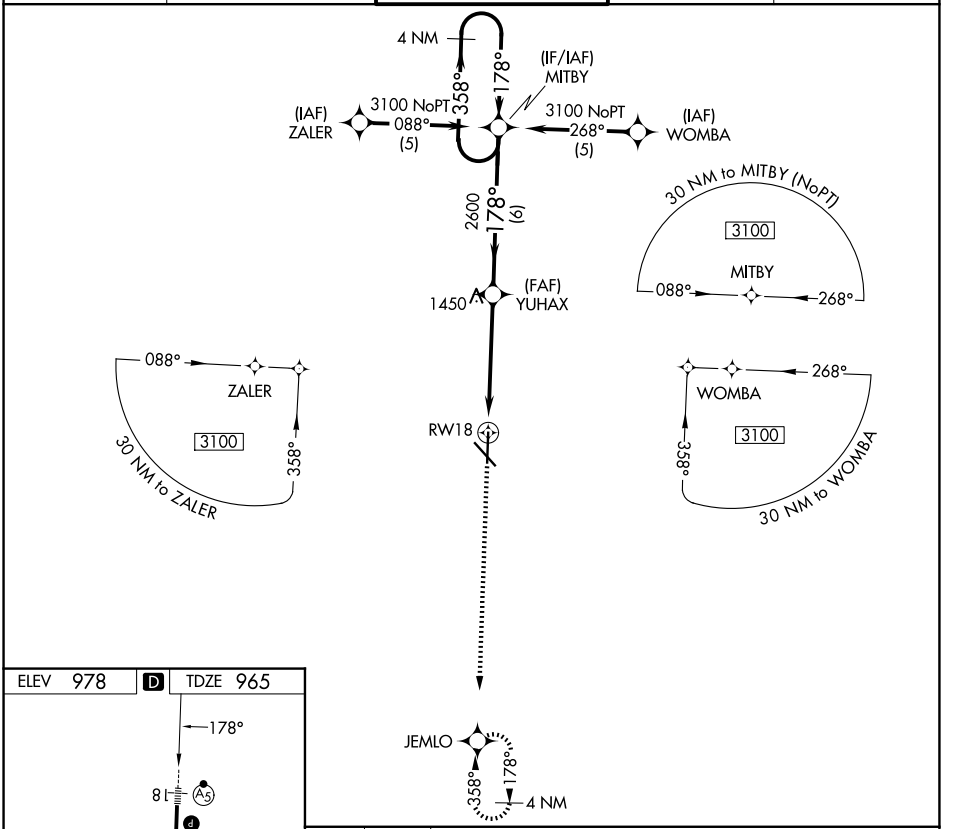

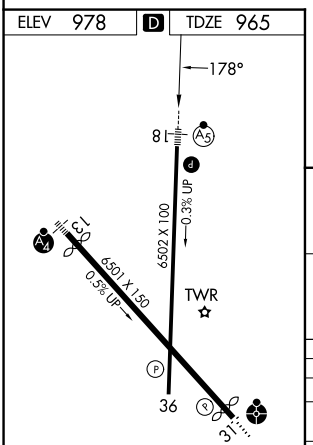
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1220/24 255 (300-½) | | | |
| LNAV/VNAV DA | 1460/60 495 (500-1¼) | | | |
| LNAV MDA | 1600/24 635 (700-½) | | 1600/60 635 (700-1¼) | 1600-1½ 635 (700-1½) |
| CIRCLING | 1600-1¾ 622 (700-1¾) | | | 1600-2 622 (700-2) |

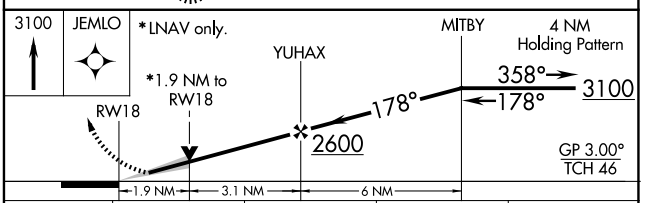

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026