RNAV (GPS) RWY 32

GULFPORT-BILOXI INTL (GPT)

WAAS	APP CRS	Rwy Ldg	9002
CH 56207	317°	TDZE	27
W32A		Apt Elev	28


RNP APCH-GPS.


T A ASR — Rwy 32 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV Cat A/B visibility to RVR 5500, and Cat C/D to RVR 6000.


MALSR (A5)

MISSED APPROACH: Climb to 2000 direct BROWA and hold.

ATIS	GULFPORT APP CON ★	GULFPORT TOWER ★	GND CON	UNICOM
119.45	127.5 254.25	123.7 (CTAF) L 339.8	120.4 348.6	122.95

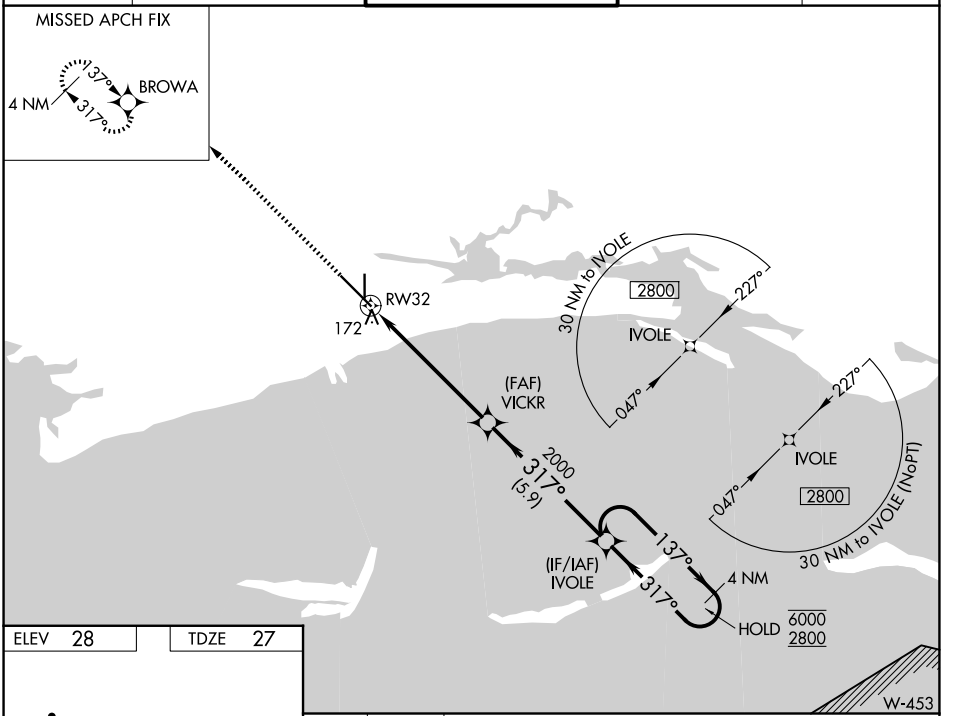

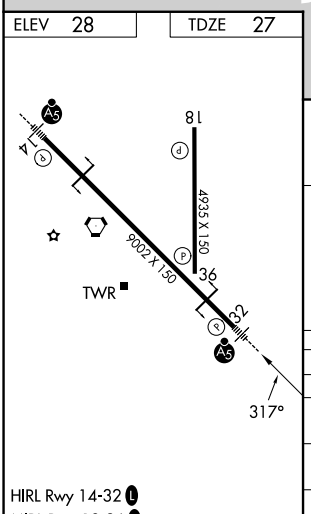

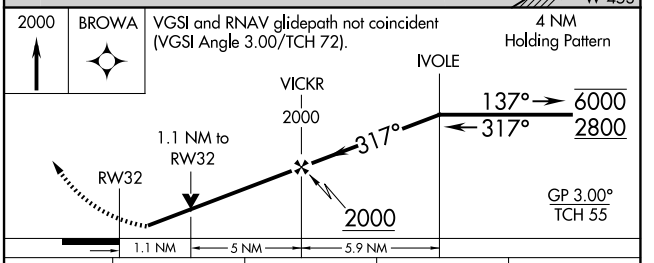

CATEGORY	A	B	C	D
LPV DA	277/40	250 (300-¾)		
LNAV/VNAV DA	466/40	439 (500-¾)		
LNAV MDA	440/40	413 (500-¾)		
CIRCLING	520-1 492 (500-1)	640-1 612 (700-1)	760-2 732 (800-2)	760-2¼ 732 (800-2¼)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026