RNAV (GPS) RWY 17L

TSTC WACO (CNW)

WAAS CH 73020 W17A	APP CRS 174°	Rwy Ldg 8600	TDZE 470	Apt Elev 470


RNP APCH - GPS.

ASR: For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2300 direct OMOBE and hold.

AWOS-3PT	WACO APP CON ★	TSTC TOWER ★	GND CON	UNICOM
134.225	127.65 227.125	124.0 (CTAF) 255.7	121.7 L	122.95

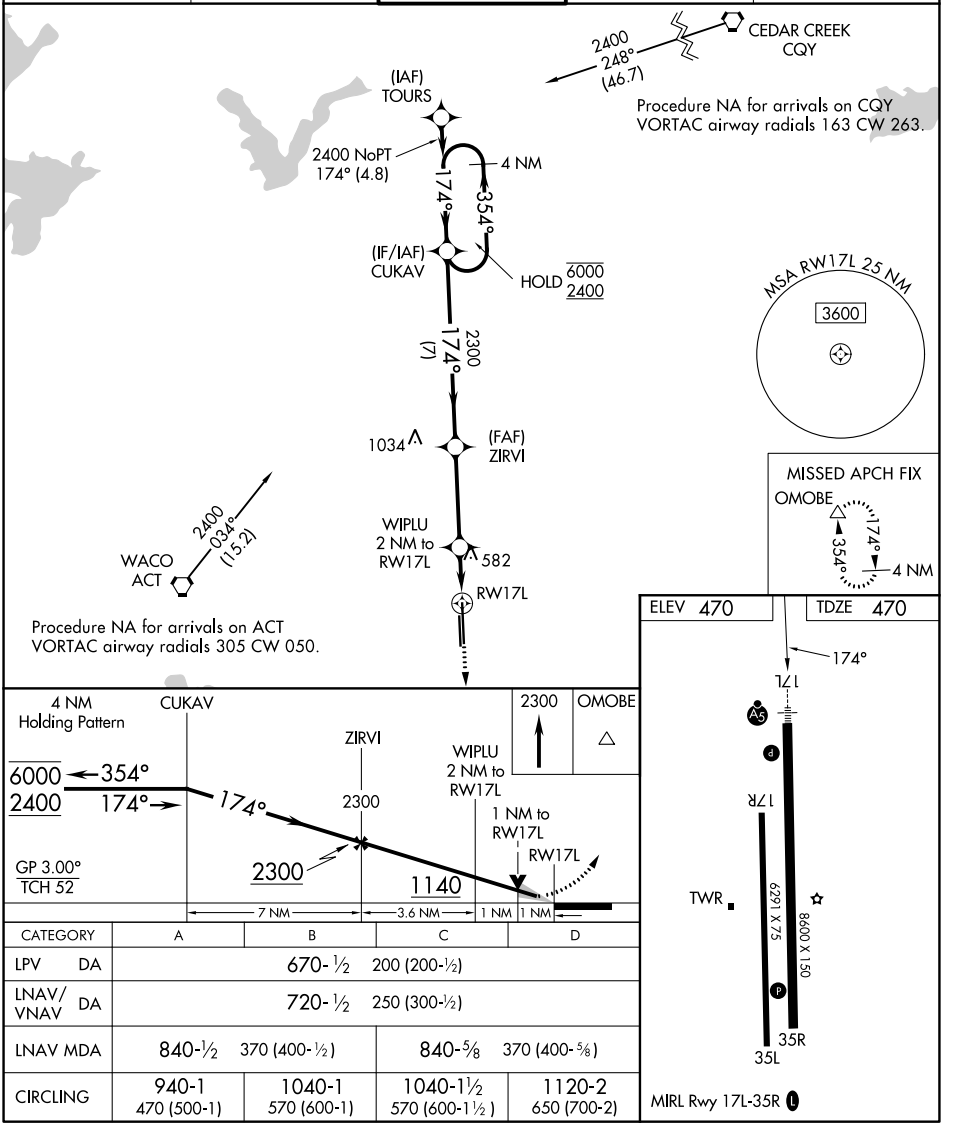

CATEGORY	A	B	C	D
LPV DA	670- ½ 200 (200-½)			
LNAV/VNAV DA	720- ½ 250 (300-½)			
LNAV MDA	840-½ 370 (400-½)		840-⅝ 370 (400-⅝)	
CIRCLING	940-1 470 (500-1)	1040-1 570 (600-1)	1040-1½ 570 (600-1½)	1120-2 650 (700-2)

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026