RNAV (GPS) RWY 17

SHAWNEE RGNL (SNL)

WAAS	APP CRS	Rwy Ldg	5997
CH 86919	174°	TDZE	1073
W17A		Apt Elev	1073


RNP APCH - GPS.


Baro-VNAV NA when using SRE altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use SRE altimeter setting: increase LPV DA to 1313 feet; increase LNAV/VNAV DA to 1487 feet; increase all MDAs 40 feet and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM and LNAV Cat C to 1⅜ SM.

MALSR


MISSED APPROACH: Climb to 4000 direct HEDEK and on track 179° to MINGG and hold.

AWOS-3PT	OKE CITY APP CON	UNICOM
118.275	120.45 288.325	122.7 (CTAF) L

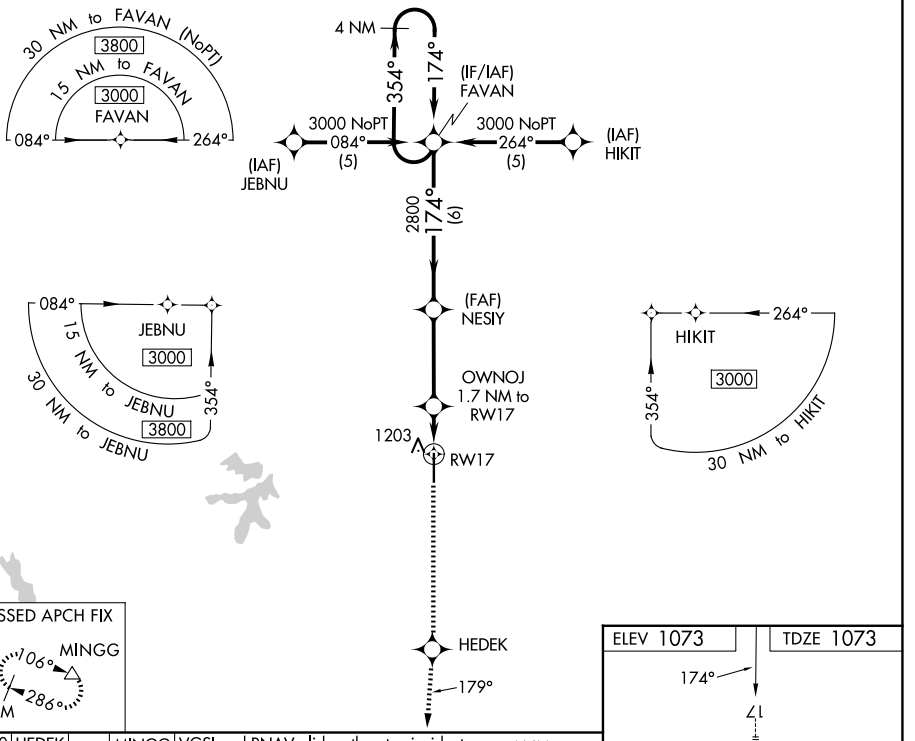

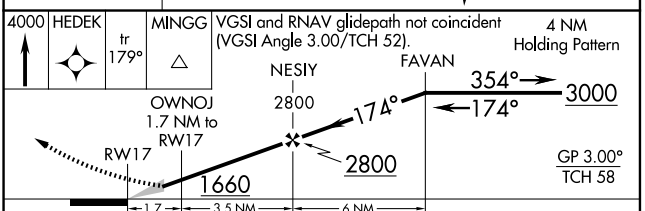

CATEGORY	A	B	C	D
LPV DA	1273-½ 200 (200-½)			NA
LNAV/VNAV DA	1447-¾ 374 (400-¾)			NA
LNAV MDA	1540-½ 467 (500-½)		1540-1 467 (500-1)	NA
CIRCLING	1600-1 527 (600-1)		1640-1½ 567 (600-1½)	NA

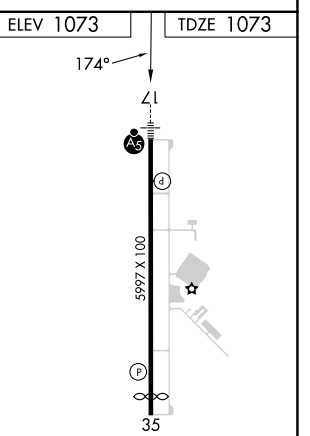

MIRL Rwy 17-35 L
REIL Rwys 17 and 35

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026