RNAV (GPS) RWY 35

SHAWNEE RGNL (SNL)


WAAS	APP CRS	Rwy Ldg	5593
CH 72818	354°	TDZE	1067
W35A		Apt Elev	1073

RNP APCH - GPS.

Baro-VNAV and VDP NA when using SRE altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use SRE altimeter setting: increase LPV DA to 1357 feet; increase LNAV/VNAV DA to 1605 feet; increase all MDAs 40 feet and Circling visibility Cat C ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct FAVAN and hold.


AWOS-3PT	OKE CITY APP CON	UNICOM
118.275	120.45 288.325	122.7 (CTAF) L

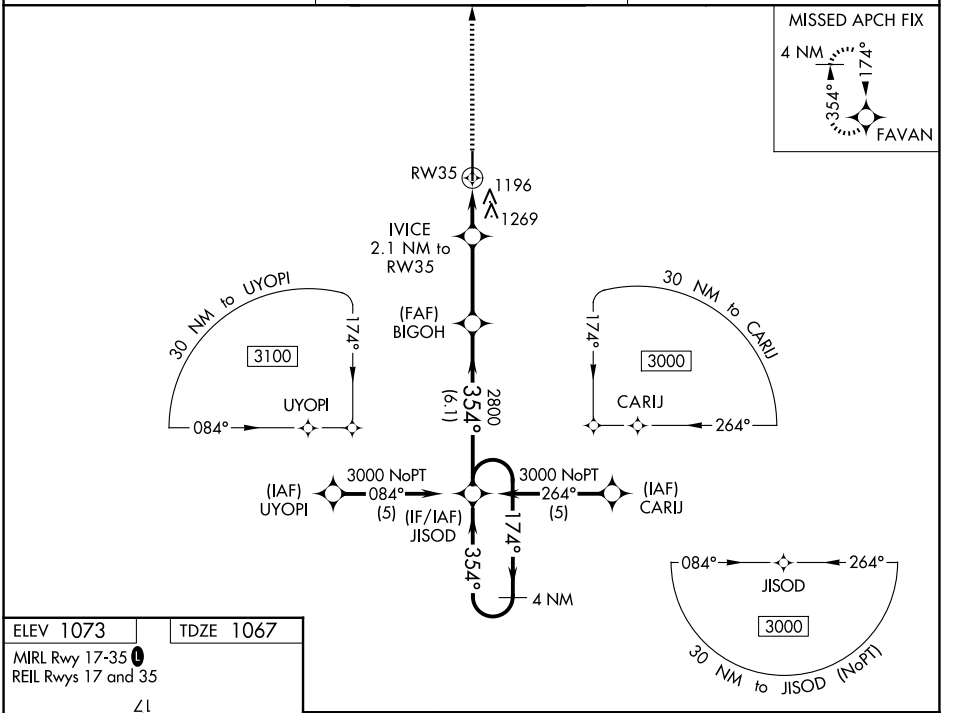


ELEV 1073 TDZE 1067

MIRL Rwy 17-35 L

REIL Rwys 17 and 35

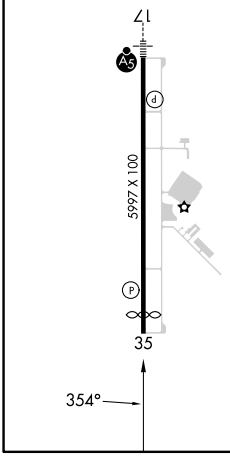

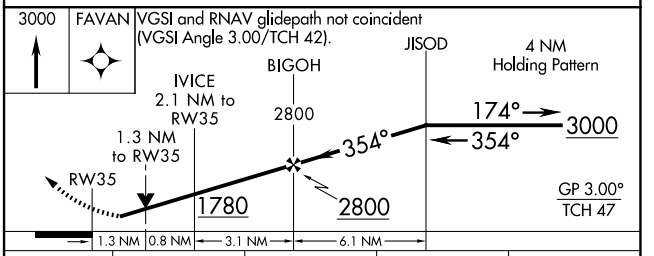

CATEGORY	A	B	C	D
LPV DA	1317-1 250 (300-1)			NA
LNAV/VNAV DA	1565-1¾ 498 (500-1¾)			NA
LNAV MDA	1520-1 453 (500-1)		1520-1⅜ 453 (500-1⅜)	NA
CIRCLING	1600-1 527 (600-1)		1640-1½ 567 (600-1½)	NA

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026