LOC/DME I-PNC	APP CRS	Rwy Ldg 7201
111.9	175°	TDZE 1004
Chan 56		Apt Elev 1009

ILS or LOC RWY 17
PONCA CITY RGNL (PNC)


DME required.


For inop ALS, increase S-LOC 17 visibility Cat C/D to 1⅜ SM. Autopilot coupled approach NA below 1570.

MALSR


MISSED APPROACH: Climb to 2700 then right turn direct PER VORTAC and hold.

ASOS	KANSAS CITY CENTER	UNICOM
134.075	127.8 319.1	123.0 (CTAF)

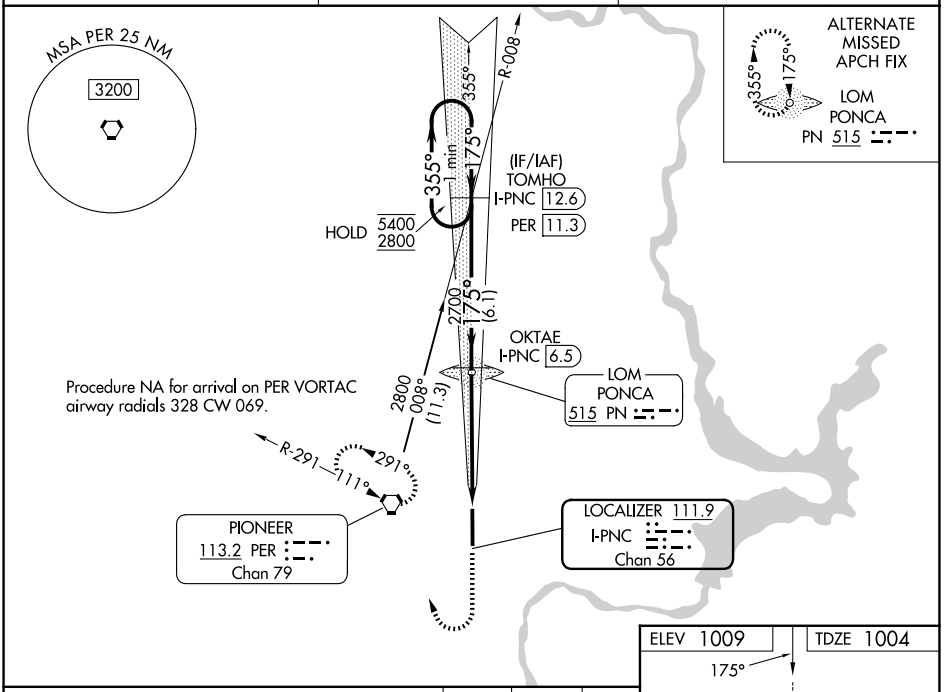

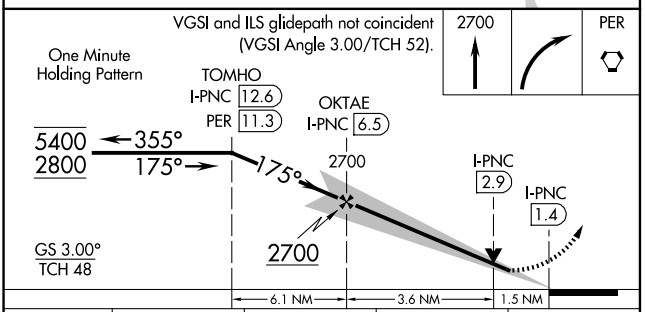

CATEGORY	A	B	C	D
S-ILS 17	1204-½ 200 (200-½)			
S-LOC 17	1520-½ 516 (600-½)		1520-1 516 (600-1)	
CIRCLING	1520-1 511 (600-1)	1580-1 571 (600-1)	1800-2¼ 791 (800-2¼)	1880-2¾ 871 (900-2¾)

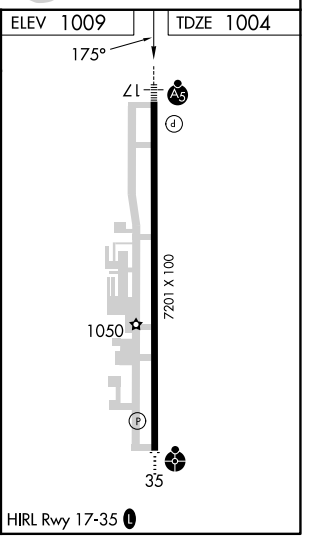

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026