WAAS	APP CRS	Rwy Ldg	7201
CH 50408	175°	TDZE	1004
W17A		Apt Elev	1009

RNAV (GPS) RWY 17

PONCA CITY RGNL (PNC)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS increase LPV visibility all Cats to ⅞ SM.


MALSR

MISSED APPROACH: Climb to 2700 direct ZULOT and hold.

ASOS	KANSAS CITY CENTER	UNICOM
134.075	127.8 319.1	123.0 (CTAF)

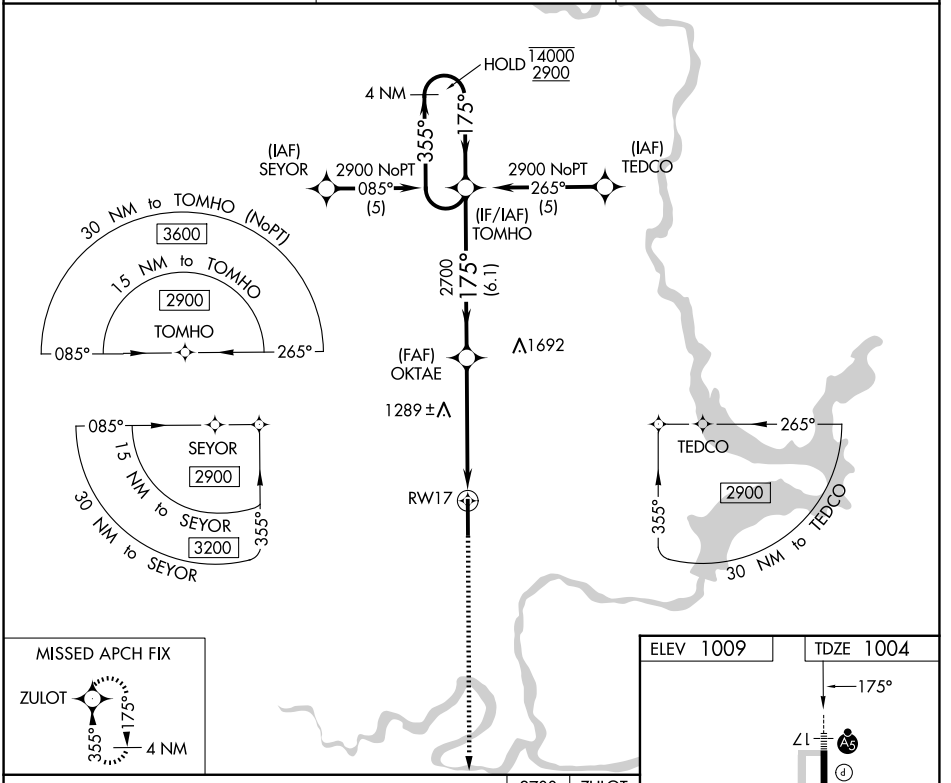

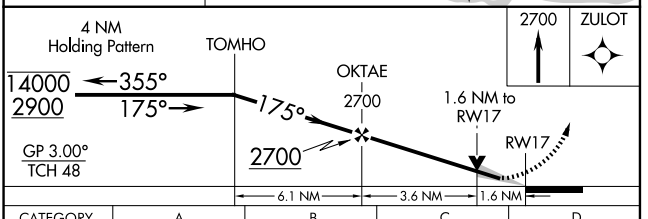

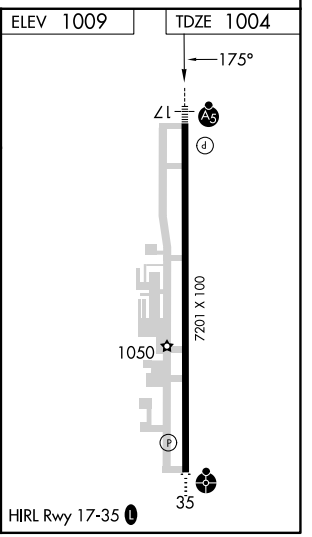

CATEGORY	A	B	C	D
LPV DA	1279-½ 275 (300-½)			
LNAV/VNAV DA	1330-½ 326 (400-½)			
LNAV MDA	1540-½ 536 (600-½)		1540-1 536 (600-1)	
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2¼ 791 (800-2¼)	1880-2¾ 871 (900-2¾)

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026