WAAS	APP CRS	Rwy Ldg	9020
CH 82109	049°	TDZE	573
W05A		Apt Elev	589

RNAV (GPS) RWY 5

TERRE HAUTE RGNL (HUF)

RNP APCH.


ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C . VDP and Baro-VNAV NA when using Paris altimeter setting. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet, and all MDA 80 feet. Increase LPV all Cats visibility ¼ SM and Circling Cat C/D visibility ¼ SM. For inoperative ALS, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cat C/D visibility to RVR 6000, when using Paris altimeter setting, increase LPV and LNAV/VNAV visibility all Cats to RVR 6000, increase LNAV Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2400 direct IPEDY and hold.


ATIS	HULMAN APP CON	HULMAN TOWER	GND CON
127.5 269.375	125.45 339.8	134.725 322.475	121.6 348.6

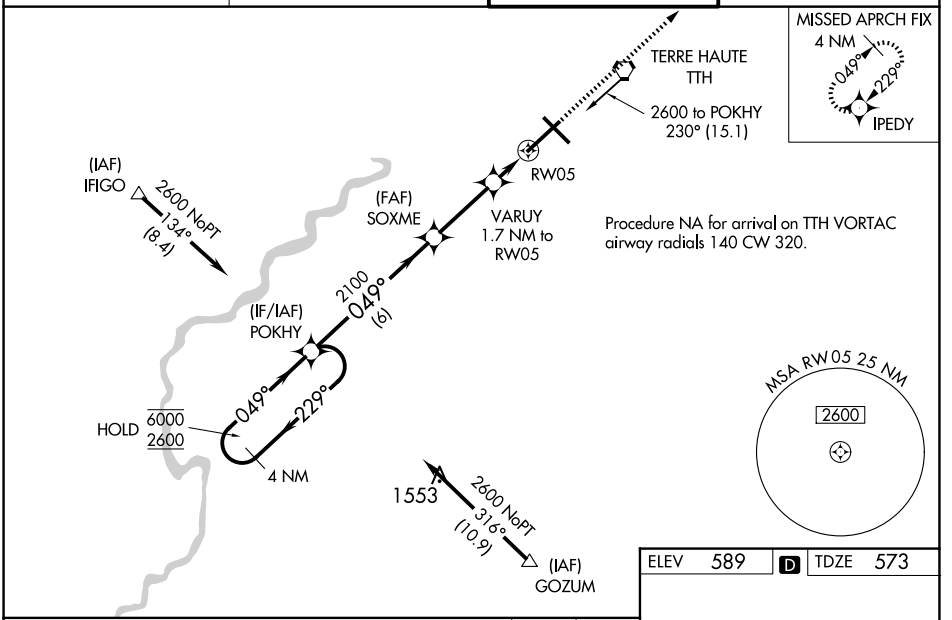

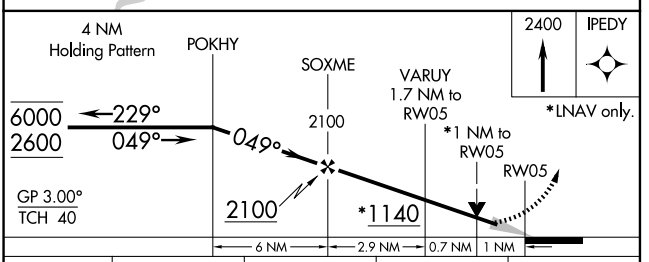

CATEGORY	A	B	C	D
LPV DA		875/24	302 (300-½)	
LNAV/VNAV DA		924/40	351 (400-¾)	
LNAV MDA		960/50	387 (400-1)	
CIRCLING	1040-1 451 (500-1)		1220-1¾ 631 (700-1¾)	1220-2 631 (700-2)

ELEV 589 D TDZE 573

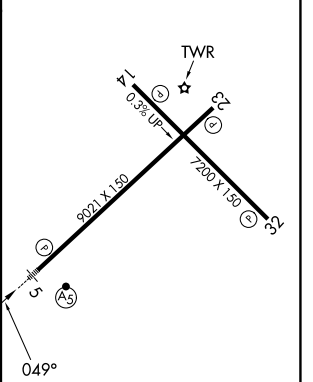

REIL Rwys 14, 23 and 32
HIRL Rwys 5-23 and 14-32

EC-2, 26 NOV 2026 to 24 DEC 2026
EC-2, 26 NOV 2026 to 24 DEC 2026