RNAV (GPS) RWY 11

LAURENCE G HANSCOM FLD (BED)

WAAS CH 87000 W11A	APP CRS 113°	Rwy Ldg 7011 / TDZE 132 / Apt Elev 132


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19° C or above 54° C.
For inop ALS, increase all LNAV/VNAV Cats visibility to RVR 5500.

MALSR


MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct ZIMOT and hold.

ATIS	BOSTON APP CON	HANSCOM TOWER ★	GND CON	UNICOM
124.6	124.4 279.6	118.5 (CTAF) L 257.2	121.7	122.95

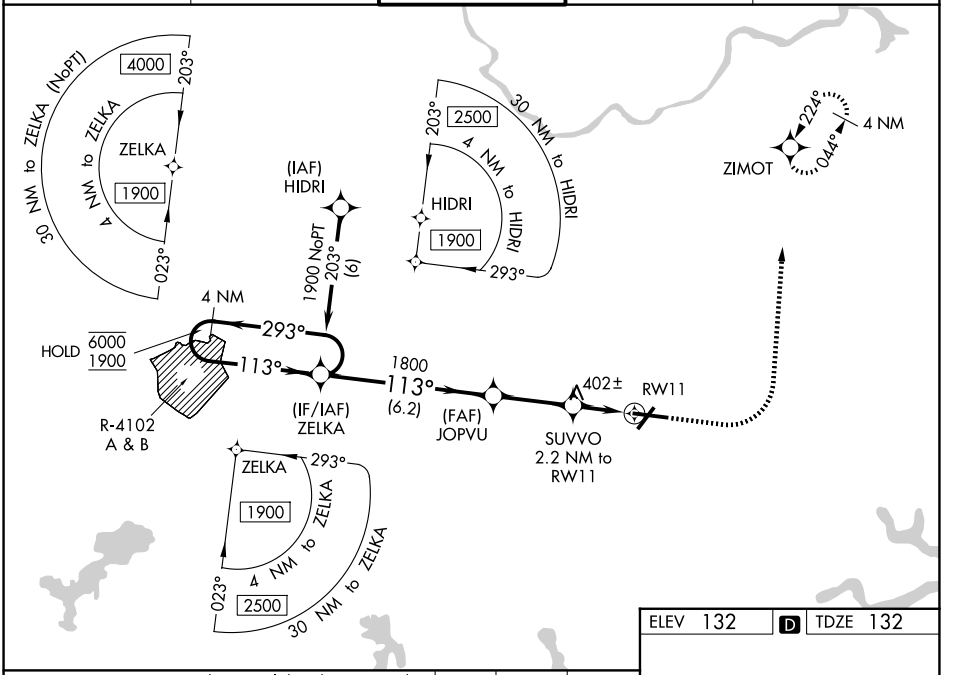

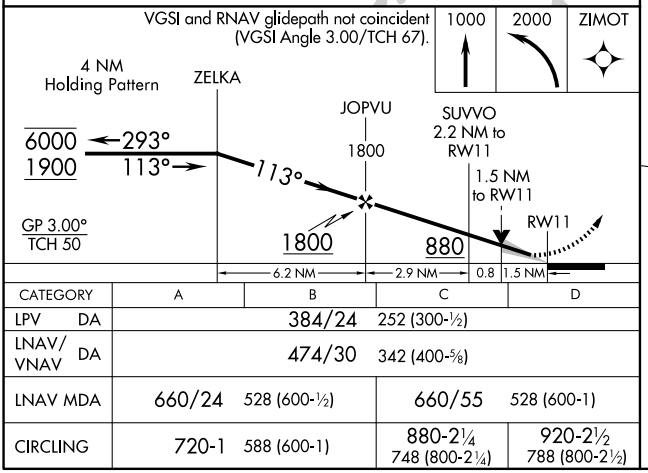

CATEGORY	A	B	C	D
LPV DA		384/24	252 (300-½)	
LNAV/VNAV DA		474/30	342 (400-⅝)	
LNAV MDA	660/24	528 (600-½)	660/55	528 (600-1)
CIRCLING	720-1	588 (600-1)	880-2¼ 748 (800-2¼)	920-2½ 788 (800-2½)

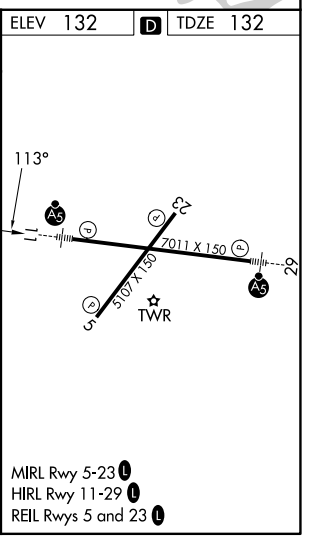

MIRL Rwy 5-23 L
HIRL Rwy 11-29 L
REIL Rwys 5 and 23 L

NE-1, 26 NOV 2026 to 24 DEC 2026
NE-1, 26 NOV 2026 to 24 DEC 2026