ILS or LOC RWY 5

BARKLEY RGNL (PAH)


LOC I-PAH	APP CRS	Rwy Ldg	6500
108.5	045°	TDZE	411
		Apt Elev	411


TA When local altimeter setting not received, use Mayfield altimeter setting and increase DA to 672, and all MDA 80 feet. Increase S-LOC 5 Cat C, D visibility ⅛ SM. For inop ALS when using Mayfield altimeter setting, increase S-ILS 5 visibility to ⅞ SM, all Cats.

MALSR (A5)

MISSED APPROACH: Climb to 1100 then climbing right turn to 2100 direct CNG VOR/DME and hold.


ASOS	MEMPHIS CENTER	PADUCAH TOWER ★	GND CON	UNICOM
118.375	133.65 292.15	119.6 (CTAF) (L) 306.9	121.7 306.9	122.95

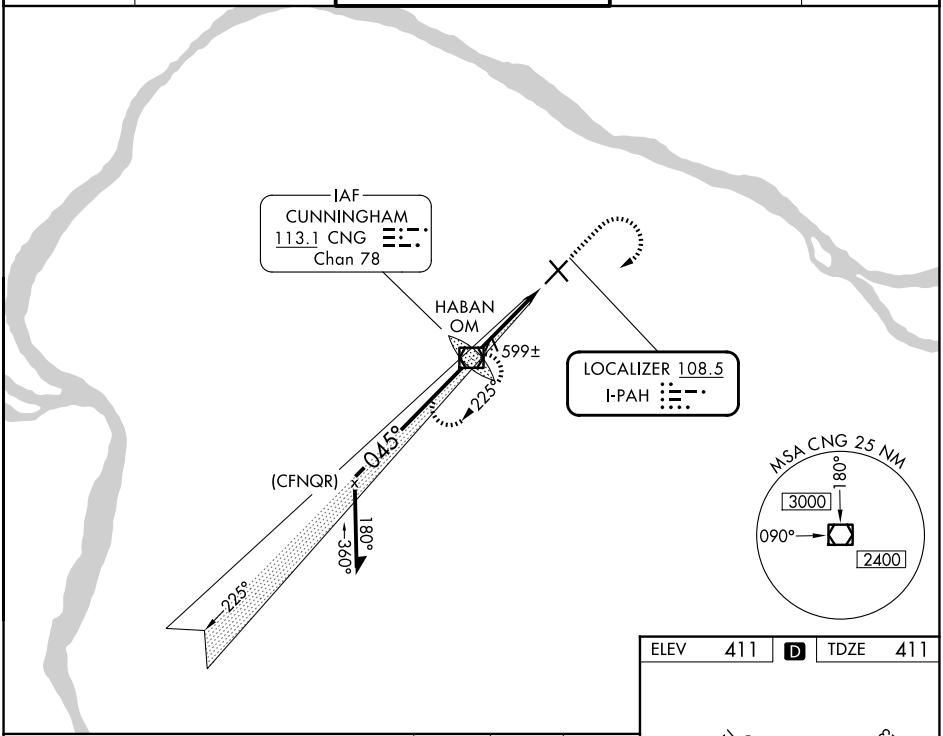

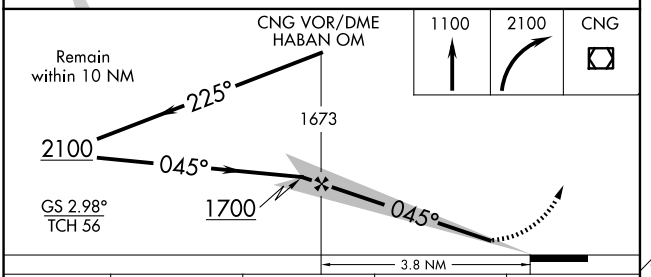

CATEGORY	A	B	C	D
S-ILS 5	611-½ 200 (200-½)			
S-LOC 5	860-½ 449 (500-½)		860-⅞ 449 (500-⅞)	
CIRCLING	900-1 489 (500-1)		920-1½ 509 (600-1½)	1100-2¼ 689 (700-2¼)

ELEV 411 (D) TDZE 411



HIRL Rwy 5-23 (L)
MIRL Rwy 14-32 (L)
REIL Rwys 23 and 32 (L)

FAF to MAP 3.8 NM

Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026