RNAV (GPS) RWY 5

BARKLEY RGNL (PAH)

WAAS	APP CRS	Rwy Ldg	6500
CH 93701	045°	TDZE	411
W05A		Apt Elev	411


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
For inop ALS, increase LNAV Cat C/D visibility to 1⅛ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct HILAM and hold.


ASOS	MEMPHIS CENTER	PADUCAH TOWER ★	GND CON	UNICOM
118.375	133.65 292.15	119.6 (CTAF) L 306.9	121.7 306.9	122.95

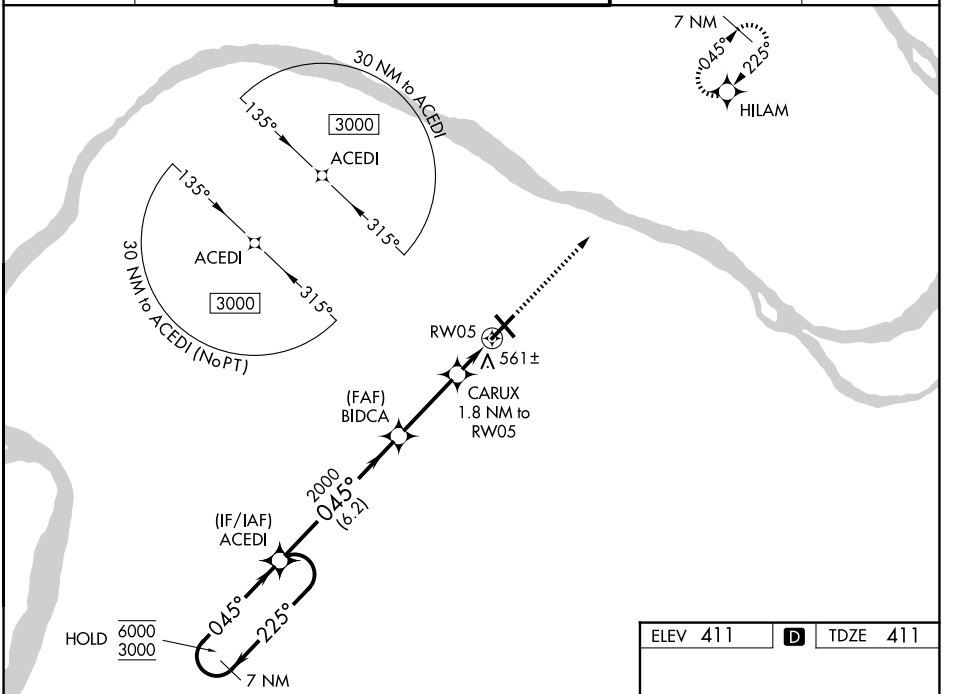

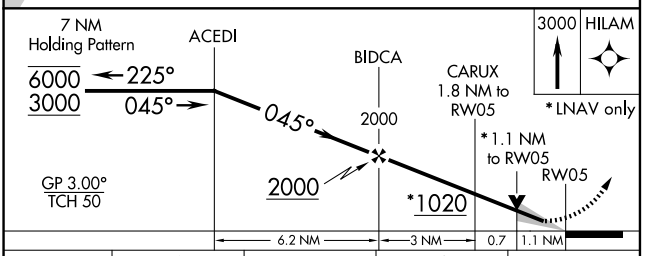

CATEGORY	A	B	C	D
LPV DA	611-½ 200 (200-½)			
LNAV/ VNAV DA	837-¾ 426 (500-¾)			
LNAV MDA	820-½ 409 (500-½)		820-¾ 409 (500-¾)	
CIRCLING	900-1 489 (500-1)		920-1½ 509 (600-1½)	1100-2¼ 689 (700-2¼)

ELEV 411 D TDZE 411



HIRL Rwy 5-23 L
MIRL Rwy 14-32 L
REIL Rwys 23 and 32 L

SE-1, 26 NOV 2026 to 24 DEC 2026