| WAAS | APP CRS | Rwy Ldg | 6780 |
|---|---|---|---|
| CH 77906 | 030° | TDZE | 830 |
| W03A | | Apt Elev | 859 |

# RNAV (GPS) RWY 3

## MID-OHIO VALLEY RGNL (PKB)


RNP APCH.


Circling Rwy 10, 28 NA at night. Rwy 3 helicopter visibility reduction below RVR 4000 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 38°C.
When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1302 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1436 feet and visibility all Cats ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ½ SM.
For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cats A/B visibility to RVR 5500. For inop ALS, when using Athens/Albany altimeter setting, increase LPV all Cats visibility to 1⅜ SM and LNAV/VNAV all Cats visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct OWAVE and hold.


| ATIS | INDIANAPOLIS CENTER | PARKERSBURG TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 124.35 | 125.55 317.475 | 123.7 (CTAF) L 257.8 | 126.45 | 122.95 |

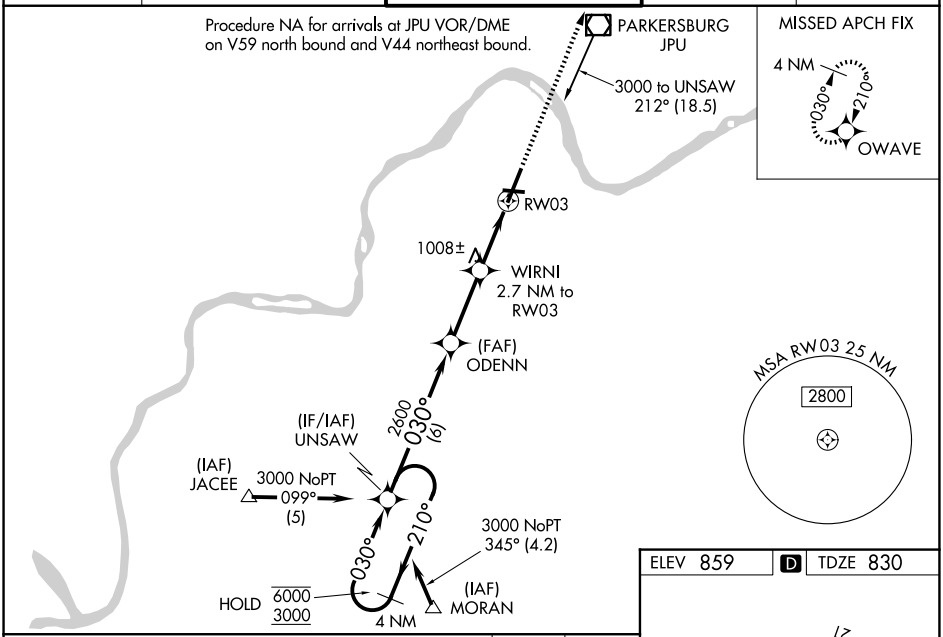

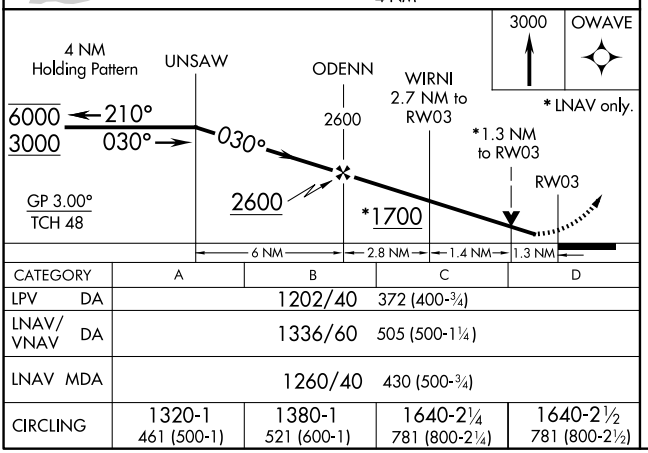
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1202/40 | | 372 (400-¾) | |
| LNAV/VNAV DA | 1336/60 | | 505 (500-1¼) | |
| LNAV MDA | 1260/40 | | 430 (500-¾) | |
| CIRCLING | 1320-1 461 (500-1) | 1380-1 521 (600-1) | 1640-2¼ 781 (800-2¼) | 1640-2½ 781 (800-2½) |

ELEV 859 D TDZE 830



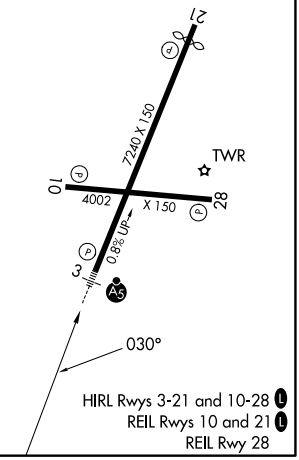


NE-4, 26 NOV 2026 to 24 DEC 2026
NE-4, 26 NOV 2026 to 24 DEC 2026