ILS or LOC RWY 6

NANTUCKET MEML (ACK)


LOC/DME I-RNE	APP CRS	Rwy Ldg	5765
109.1	059°	TDZE	38
Chan 28		Apt Elev	47


▼ Inop table does not apply to S-ILS 6. For inop ALS, increase S-LOC 6 all Cats visibility to RVR 5000.


MALSF

MISSED APPROACH: Climb to 1800 direct ACK VOR/DME and hold, continue climb-in-hold to 1800.

ATIS	BOSTON APP CON	NANTUCKET TOWER ★	GND CON	UNICOM
127.5	126.1 318.1	118.3 (CTAF) L	132.5	122.95

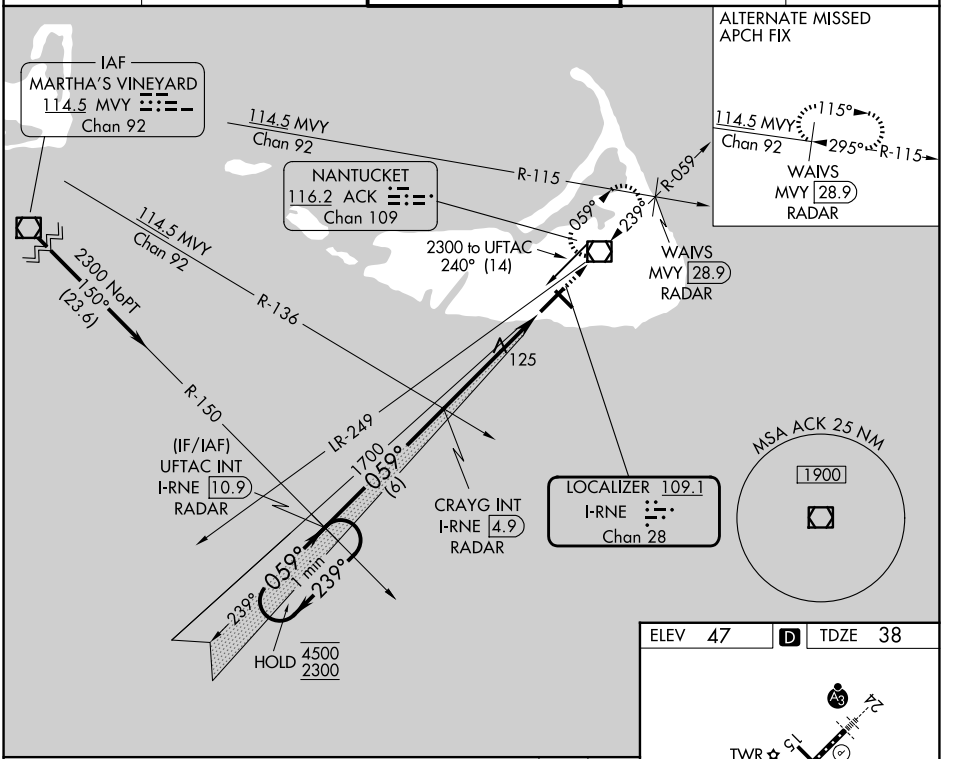

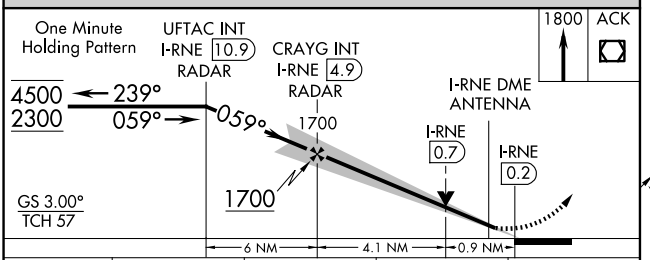

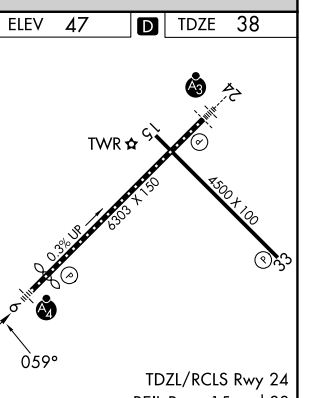

TDZL/RCLS Rwy 24
REIL Rwys 15 and 33
MIRL Rwy 15-33 L
HIRL Rwy 6-24 L

CATEGORY	A	B	C	D
S-ILS 6	238/40 200 (200- ¾)			
S-LOC 6	380/40 342 (400- ¾)			
CIRCLING	480-1 433 (500-1)	500-1 453 (500-1)	720-2 673 (700-2)	720-2¼ 673 (700-2¼)

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NE-1, 26 NOV 2026 to 24 DEC 2026
NE-1, 26 NOV 2026 to 24 DEC 2026