RNAV (GPS) RWY 6

NANTUCKET MEML (ACK)

WAAS	APP CRS	Rwy Ldg	5765
CH 81912	059°	TDZE	38
W06A		Apt Elev	47


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS increase LNAV/VNAV visibility all Cats to RVR 4500, and LNAV visibility all Cats to RVR 5500. Inop table does not apply to LPV.

MALSF


MISSED APPROACH: Climb to 1800 direct WAIVS and hold, continue climb in hold to 1800.

ATIS	BOSTON APP CON	NANTUCKET TOWER ★	GND CON	UNICOM
127.5	126.1 318.1	118.3 (CTAF) L	132.5	122.95

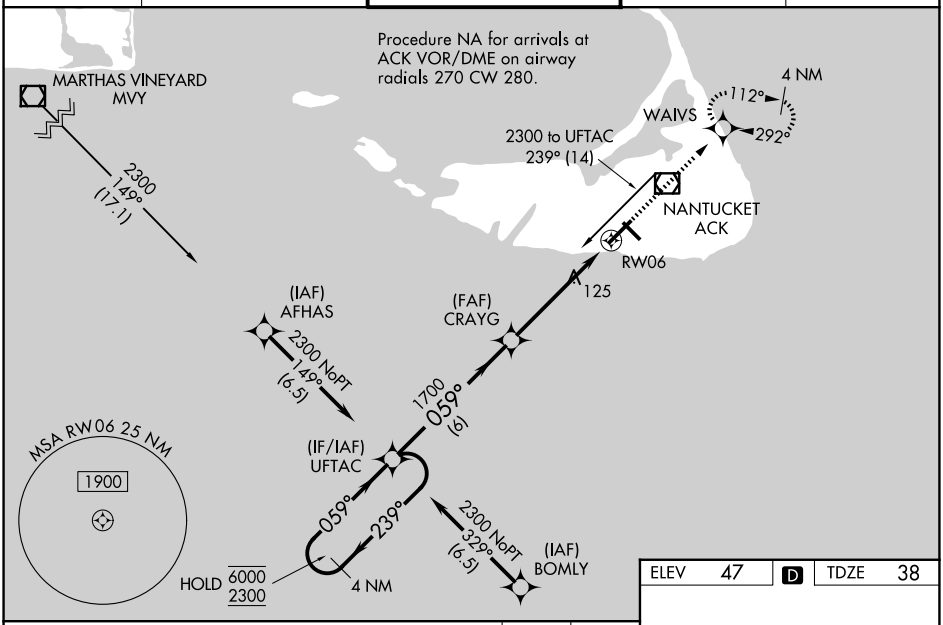

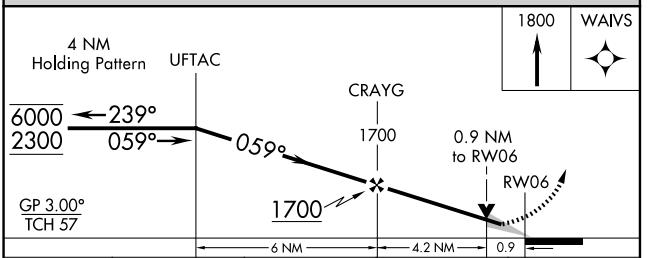

CATEGORY	A	B	C	D
LPV DA	238/40	200 (200-¾)		
LNAV/VNAV DA	300/40	262 (300-¾)		
LNAV MDA	380/40	342 (400-¾)		
CIRCLING	480-1 433 (500-1)	500-1 453 (500-1)	720-2 673 (700-2)	720-2¼ 673 (700-2¼)



TDZL/RCLS Rwy 24
REIL Rwys 15 and 33
MIRL Rwy 15-33 L
HIRL Rwy 6-24 L

NE-1, 26 NOV 2026 to 24 DEC 2026
NE-1, 26 NOV 2026 to 24 DEC 2026