WAAS CH 82322 W28A	APP CRS 285°	Rwy Ldg 7001 TDZE 331 Apt Elev 331

RNAV (GPS) RWY 28
WATERTOWN INTL (ART)


RNP APCH - GPS.


Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cats A/B visibility to 1 SM.


MALSR

MISSED APPROACH: Climb to 2400 direct TAREE and hold.

ASOS	WHEELER-SACK APP CON	UNICOM
132.325	124.875 307.125	123.0 (CTAF) L

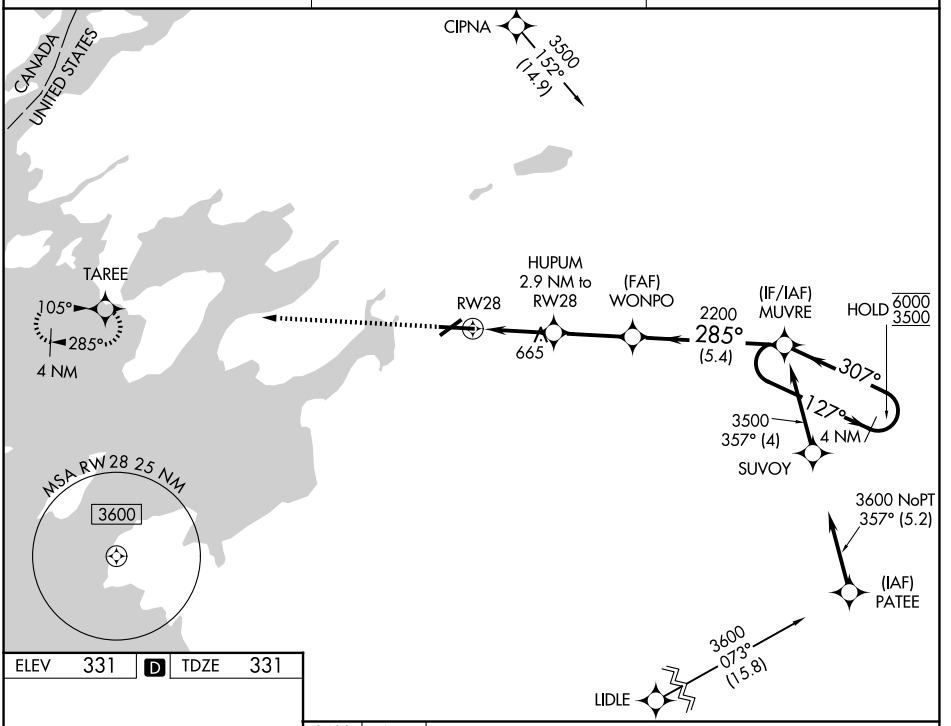



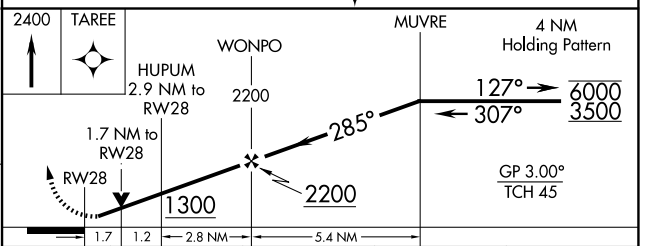

CATEGORY	A	B	C	D
LPV DA		531-½	200 (200-½)	
LNAV/VNAV DA		852-1	521 (600-1)	
LNAV MDA	920-¾	589 (600-¾)	920-1¼	589 (600-1¼)
CIRCLING	920-1 589 (600-1)	960-1 629 (700-1)	980-1¾ 649 (700-1¾)	1080-2½ 749 (800-2½)

REIL Rwy 25 L
HIRL Rwy 7-25 L
MIRL Rwy 10-28 L

NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026